

T20

Linux POS



Linux



4G + 3G + 2G
Wi-Fi 4: 2.4Ghz
BT4.2



3.5" LCM
320*480 Pixels



MSR + IC + NFC + QR



PURE Payments



Retail



Supermarket



Restaurant



Hotel



Parking lot



Gas station

| | |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System | Linux |
| Processor | Dual-Core 2*A53@1.3GHz |
| Memory | RAM: 256MB + ROM: 512MB |
| Communications | 4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 4: 2.4GHz, Bluetooth 4.2/BLE |
| Location | GPS, GLONASS |
| Display | 3.5 inch, 320*480, TFT |
| Camera | Rear: 0.3MP, Support Scanner 1D&2D code |
| Printer | High-speed thermal printer, Paper size: 58mm*40mm |
| Battery | 3.7V/5200mAh |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping |
| IC Card Reader | ISO/IEC 7816, Conform to EMV L1/L2 |
| NFC | 13.56MHz, ISO/IEC 14443, Type A&B, Mifare card |
| Keys / Buttons | 19Keys: 0~9 F1 F2 F3 up down Enter(green) power on/off(red) Clear(yellow) Cancel(red) |
| Audio | 1W |
| Card Slot | Normal SIM*2 + PSAM*2 + TF Card*1 |
| Peripheral Ports | Type C*1(USB2.0) |
| Adapter | Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A |
| Physical | 198.2mm (L)*80.7mm (W)*53.6mm (H) |
| Weight | 410g |
| Environment | Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 70°C (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories | Adapter*1, USB Cable (only charging)*1, Manual*1 |
| Certifications | PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, Pure, qUICS, CE, TQM, DGM, UN38.3, MSDS, GSMA, WEEE, NTRA-VOC |

Optional Items


- USB Cable**
Type C (data/damping)

Charging Cradle
5V/2A

Screen Protector
Hydrogel film
- Silicone Cover**
Customized colors

POS Bracket
Desktop bracket

T20 Accessories

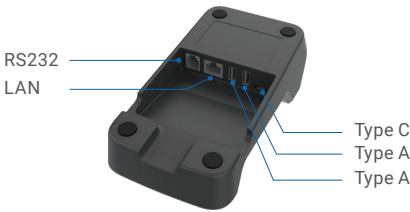

Charging Cradle



POS Bracket

Desktop bracket



Screen Protector

Hydrogel film