


FEITIAN

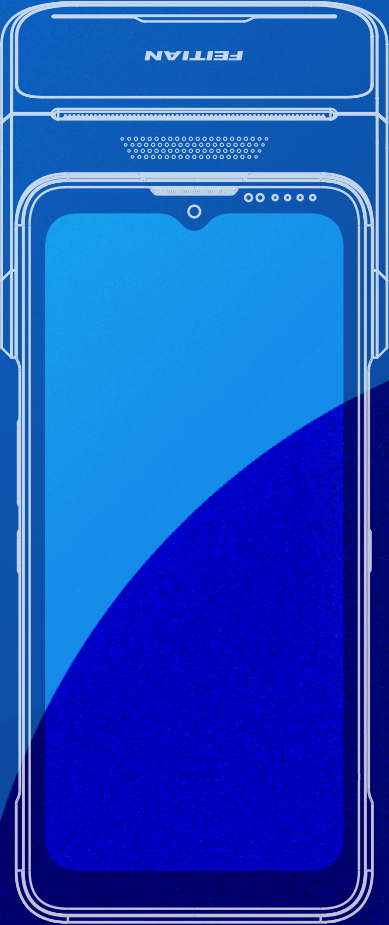

FEITIAN Technologies Co., Ltd.

Stock Code: 300386.SZ

Tel: +86 10 62304466

Email: sales-support1@ftsafes.com

Web: www.ftsafes.com/payment

Add: Tower B, Huizhi Building, No. 9 Xueqing Road,
Haidian District, 100085, Beijing, China



This document is provided to you for informational purposes only. All features and specifications are subject to change without notice.
FEITIAN and the FEITIAN logo are either trademarks or registered trademarks of FEITIAN Technologies Co., Ltd. in China and/or other countries.
All other trademarks or brand names are the properties of their respective holders. © 2025 FEITIAN Technologies Co., Ltd. All rights reserved.

About FEITIAN



Founded
in 1998



HQ: Beijing
6 branches
11 offices



700+
employees
R&D >400



800+
patents



3000+
customers



60M+ pcs
per year



Stock Code
300386.SZ



ISO9001



ISO14001



ISO27001



ISO45001



CMMI LEVEL3



Production Facility

9,398 m²
Total Area

6,166 m²
Plant Area

1,589 m²
Office Area

1,643 m²
Dormitory Area

Production Output

- ✓ 5 Million/Year Payment POS
- ✓ 45 Million/Year Chip Cards
- ✓ 50 Million/Year Power Cards

F20 Payment Android POS



F20 FP Fingerprint



F20 Fiscal

SPECIFICATIONS

F20		F20 ^[U]	
Operating System	Android 14	Operating System	Android 12 (optional: Android 10)
Processor	Quad-Core 4*A53@2.0GHz	Processor	Quad-Core 4*A53@1.4GHz
Memory	RAM: 2GB+ROM: 16GB	Memory	RAM: 1GB+ROM: 8GB
Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4&5GHz, Bluetooth 5.0/BLE	Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 4: 2.4GHz(optional: 5GHz), Bluetooth 4.2/BLE
Location	GPS, BDS, Galileo, GLONASS, QZSS, SBAS	Location	GPS, BDS, GLONASS/Galileo
Display	5.5 inch, HD IPS LCD, 1440*720 Pixel, Multi-touch	Display	5.5 inch, HD IPS LCD, 1280*720 Pixel, Multi-touch
Cameras	Rear: 8MP AF with Flash LED Front: 2MP FF Support 1D/2D barcode	Camera	Rear: 2MP FF with Flash LED Support 1D/2D barcode
Printer	High-speed thermal printer, Paper size: 58mm*40mm	Printer	High-speed thermal printer, Paper size: 58mm*40mm
Battery	7.6V/2500mAh (Equal to 3.8V/5000mAh)	Battery	7.6V/2500mAh (Equal to 3.8V/5000mAh)
Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping	Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2	IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, IEC/ISO 18092, Type A&B, Felica, Mifare card	NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Card Slot	SIM*2 + PSAM*1	Card Slot	SIM*2 + PSAM*1
Peripheral Port	Type C*1 (USB2.0, OTG)	Peripheral Port	Type C*1 (USB2.0, OTG)
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A	Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Physical	212.6mm (L)*79.1mm (W)*51.9mm (H)	Physical	212.6mm (L)*79.1mm (W)*51.9mm (H)
Weight	427g	Weight	427g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F), Storage Temperature: -20°C ~ 70°C (-4°F~158°F), Relative Humidity: 5%-96% (Non-Condensing)		
Accessories	Adapter*1, USB Cable (only charging)*1, Manual*1		
Certifications	PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, JCB, Pure, qUICS, Rupay, NSICC, TQM, CPACE, AuspayNET, EFT POS, INTERAC, NAPAS, RoHS, CE, FCC, PTCRB, EAC, BIS, ATEX, WEEE, CB, WPC, DGM, UN38.3, MSDS, NTRA-VOC, GSMA, Telec, JATE, ANRT, CMC, Google Smart Tap, RNIB, EAA		

F210 Payment Android POS



F210 FP Fingerprint



F210 Fiscal

SPECIFICATIONS

F210	F210^[B]	F210^[U5]
Operating System Android 12	Operating System Android 12	Operating System Android 12
Processor Quad-Core 4*A53@1.4GHz	Processor Quad-Core 4*A53@1.4GHz	Processor Quad-Core 4*A53@1.4GHz
Memory RAM: 1GB + ROM: 8GB	Memory RAM: 1GB + ROM: 8GB	Memory RAM: 1GB + ROM: 8GB
Communications 4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4&5GHz (optional: 2.4GHz), Bluetooth 4.2/BLE	Communications 4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4GHz (optional: 5GHz), Bluetooth 4.2/BLE	Communications 4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4GHz (optional: 5GHz), Bluetooth 4.2/BLE
Location GPS, BDS, GLONASS/Galileo	Location GPS, BDS, GLONASS/Galileo	Location GPS, BDS, GLONASS/Galileo
Display 5.0 inch, IPS LCD, 1280*720 Pixel, Multi-touch	Display 5.0 inch, IPS LCD, 854*480 Pixel, Multi-touch	Display 5.0 inch, IPS LCD, 854*480 Pixel, Multi-touch
Cameras Rear: 8MP AF with Flash LED Front: 2MP FF Support 1D/2D barcode	Camera Rear: 2MP AF with Flash LED Support 1D/2D barcode	Camera Rear: 2MP AF with Flash LED Support 1D/2D barcode
Printer Thermal printer, Paper size: 58mm*40mm	Printer Thermal printer, Paper size: 58mm*40mm	Printer Thermal printer, Paper size: 58mm*40mm
Battery 3.8V/5000mAh	Battery 3.8V/5000mAh	Battery 3.7V/5200mAh
Magnetic Card Reader ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping	Magnetic Card Reader ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping	Magnetic Card Reader ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping
IC Card Reader ISO/IEC 7816, Conform to EMV L1/L2	IC Card Reader ISO/IEC 7816, Conform to EMV L1/L2	IC Card Reader ISO/IEC 7816, Conform to EMV L1/L2
NFC 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card	NFC 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card	NFC 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Card Slot Micro SIM*2 + PSAM*1 + TF Card*1 (TF, Max support 256GB)	Card Slot Micro SIM*2 + PSAM*1 + TF Card*1 (TF, Max support 256GB)	Card Slot Micro SIM*2 + PSAM*1 + TF Card*1 (TF, Max support 256GB)
Peripheral Port Type C*1 (USB2.0, OTG)	Peripheral Port Type C*1 (USB2.0, OTG)	Peripheral Port Type C*1 (USB2.0, OTG)
Adapter Input: 100-240V AC, 50/60Hz 0.35A Output: 5.0V DC/2.0A	Adapter Input: 100-240V AC, 50/60Hz 0.35A Output: 5.0V DC/2.0A	Adapter Input: 100-240V AC, 50/60Hz 0.35A Output: 5.0V DC/2.0A
Physical 197mm (L)*82.1mm (W)*52.5mm (H)	Physical 197mm (L)*82.1mm (W)*52.5mm (H)	Physical 197mm (L)*82.1mm (W)*52.5mm (H)
Weight 410g	Weight 410g	Weight 410g
Environment Operating Temperature: -10°C ~ 50°C (14°F~122°F), Storage Temperature: -20°C ~ 70°C (-4°F~158°F) , Relative Humidity: 5%-96% (Non-Condensing)		
Accessories Adapter*1, USB Cable (only charging)*1, Manual*1		
Certifications PCI, EMV L1&L2, EMV Contactless L1, Amex, PayWave, Paypass, Discover, JCB, Pure, qUICS, MIR, NTRA-VOC, WEEE, CE, FCC, CB, CMC, GSMA, TQM, ANRT, CCC, SRR, Nal Certificate, UPTS3.0, PBOC3.0 L1&CL1, PBOC3.0 CL2, DGM, UN38.3, MSDS		

F300

Payment
Android POS



F300 Back Clip Scanner

SPECIFICATIONS


Operating System	Android 14	
Processor	Quad-Core 4*A53@2.0GHz	
Memory	RAM: 2GB + ROM: 8GB	
Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4GHz, Bluetooth 5.0/BLE	
Location	GPS, BDS, Galileo, GLONASS, QZSS, SBAS	
Display	4.0 inch, IPS LCD, 800*480 Pixel, Multi-touch	
Camera	Rear: 2MP FF with Flash LED Support 1D/2D barcode	
Battery	3.8V/2800mAh (Built-in battery)	
Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping	
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2	
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card	
Card Slot	SIM*1 + PSAM*1	
Peripheral Port	Type C*1 (USB2.0, OTG)	
Adapter	Input: 100-240V AC, 50/60Hz 0.35A	Output: 5V DC/2.0A
Audio	1W	
Physical	135.5mm (L)*65mm (W)*16.5mm (H)	
Weight	174g	
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 70°C (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing)	
Accessories	Adapter*1, USB Cable (only charging)*1, Manual*1	
Certifications	PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, JCB, Amex, Discover, Pure, qUICS, Rupay, AuspayNET, EFT POS, NSICCS, TQM, WPC, CE, FCC, ANRT, CB, CMC, RoHS, BIS, DGM, UN38.3, MSDS, NTRA-VOC, GSMA, Google Smart Tap, WEEE	

F310 P


Payment
Android POS



MSR + IC CARD + NFC



NFC



IC CARD + NFC

SPECIFICATIONS

F310 P		F310 P [RK]	
Operating System	Android 13	Operating System	Android 14
Processor	Quad-Core 4*A53@2.0GHz	Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 2GB + ROM: 16GB	Memory	RAM: 2GB + ROM: 16GB
Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4&5GHz, Bluetooth 5.0/BLE	Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA), Wi-Fi 6: 2.4&5GHz, Bluetooth 5.4/BLE
Location	GPS, BDS, Galileo, GLONASS, QZSS, SBAS	Location	GPS, BDS, GLONASS (Select two from three)
Display	6.5 inch, HD IPS LCD, 1600*720 Pixel, Multi-touch	Display	6.5 inch, HD IPS LCD, 1600*720 Pixel, Multi-touch
Cameras	Rear: 8MP AF with Flash LED Front: 2MP FF Support 1D/2D barcode	Cameras	Rear: 8MP AF with Flash LED Front: 2MP FF Support 1D/2D barcode
Battery	3.8V/3000mAh	Battery	3.8V/3000mAh
Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping	Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2	IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card	NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Keys/Buttons	Power Key, Function Key, Volume+/- Key	Keys/Buttons	Power Key, Function Key, Volume+/- Key
Sensor	Proximity Sensor (P-Sensor), Light Sensor (L-Sensor)	Sensor	Proximity Sensor (P-Sensor), Light Sensor (L-Sensor)
Audio	1W	Audio	1W
Card Slot	SIM*1 + PSAM*2 or SIM*2 + PSAM*1, TF card*1 (up to 1TB)	Card Slot	SIM*1 + PSAM*2 or SIM*2 + PSAM*1, TF card*1 (up to 1TB)
Peripheral Ports	Type C*1 (USB2.0, OTG), Pogopin (6PIN)*1, Pogopin (8PIN)*1	Peripheral Ports	Type C*1 (USB2.0, OTG), Pogopin (6PIN)*1, Pogopin (8PIN)*1
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A	Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Physical/	173mm (L)*82.5mm (W)*17.2mm (H)	Physical/	173mm (L)*82.5mm (W)*17.2mm (H)
Weight	278g	Weight	278g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F), Storage Temperature: -20°C ~ 70°C (-4°F~158°F), Relative Humidity: 5%-96% (Non-Condensing)		
Accessories	Adapter*1, USB Cable (only charging)*1, Manual*1		
Certifications	PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, JCB, Pure, qUICS, Rupay, NSICC, TQM, CPACE, AuspayNET, EFT POS, INTERAC, NAPAS, RoHS, CE, FCC, PTCRB, EAC, BIS, ATEX, WEEE, CB, WPC, DGM, UN38.3, MSDS, NTRA-VOC, GSMA, Telec, JATE, ANRT, CMC, Google Smart Tap, RNIB		

F310 Accessories



F310-1 Printer Module

Printing Method	Thermal dot printing
Number of Dots	384 dots/line
Resolution	8 dots/mm(203 dpi)
Paper Size	58mm*40mm
Max Printing Speed	70 mm/s
Physical /Weight	89.8mm(L)*82.7mm(W)*76.7mm(H)/97g



F310-2 Unattended

Card Slot	SIM*1 + PSAM*2 or SIM*2 + PSAM*1
Interface	RS232-A*1(RJ45), RS232-B*1(RJ45), LAN*1(RJ45), PWRDIG.I/O*1, MDB-M EXE*1, MDB-S*1, 4G SMA*1, Type A*1, Type C*1(USB2.0, OTG)
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 12V-48V DC/2.0A
Physical/Weight	195.7mm(L)*101mm(W)*64.2mm(H)/565g



F310-3 5000mAh Battery Module

Battery	3.8V/5000mAh
Physical/Weight	173mm(L)*81mm(W)*26.4mm(H)/439.5g
Fiscal Module	USB/37.15mm(L)*15.70mm(W)*6.40mm(H) UART/30mm(L)*29.95mm(W)*9.40mm(H)
Battery	3.8V/3000mAh
Physical/Weight	173mm(L)*81mm(W)*26.4mm(H)/388.5g



F310-4 Scanner Module

Motion Tolerance	High motion tolerance(6 m/s)
Max Image Speed	Maximum image capture rate of 120 fps
Scan Modes	Support 1D, 2D barcode and OCR
Physical/Weight	209.2mm(L)*85.1mm(W)*81.1mm(H)/33.5g



F310-5 Rugged Device

Ingress Protection Rating	IP66
Drop Height	1.8m
Scanner(optional)	
Motion Tolerance	High motion tolerance(6 m/s)
Max Image Speed	Maximum image capture rate of 120 fps
Scan Modes	Support 1D, 2D barcode and OCR
Physical/Weight	191.5mm(L)*95.4mm(W)*32.5mm(H)/440g

2" Printer(58mm)(optional)

Printing Method	Thermal dot printing
Number of Dots	384 dots/line
Paper Size	58mm*40mm
Max Printing Speed	70 mm/s

F310-6 Charging Cradle

Ports	Type C*1, RJ45*1, Type A*2, RJ11*1(RS232)
Physical/Weight	159.6mm(L)*100mm(W)*51mm(H)/180g



F310-9 Printer+Customer Display Module

Printer Screen	LCD 1.6 inch TFT 128*64
2" Printer(58mm)	
Printing Method	Thermal dot printing
Number of Dots	384 dots/line
Resolution	8 dots/mm(203 dpi)
Paper Size	58mm*40mm
Max Printing Speed	70 mm/s
Physical/Weight	89.8mm(L)*86.2mm(W)*76.7mm(H)/146g

F310-10 Printer+Capacitive FP Module

2" Printer(58mm)

Printing Method	Thermal dot printing
Number of Dots	384 dots/line
Resolution	8 dots/mm(203 dpi)
Paper Size	58mm*40mm
Max Printing Speed	70 mm/s

Capacitive Fingerprint Module

Image Size	256*360 Pixel
Image Resolution	508 dpi
Sensor Type	Semiconductor capacitive
Physical/Weight	89.8mm(L)*91.7mm(W)*76.7mm(H)/147g





F310-12 Optical FP Module

ID Optical Fingerprint Module
(CBM E3/V3, SM-92M, Slim2/2s, FS81H/FS89H)

Image Quality Standards	FBI PIV/Mobile ID FAP10/20 compliant
Sensor Type	Optical
Resolution	500 dpi
Gray Scale	256 level
Physical/Weight	115mm(L)*89.8mm(W)*25.2mm(H)/107g

F310-12P Identification Printer Module

ID Optical Fingerprint Module

Image Quality Standards	FBI PIV/Mobile ID compliant
Sensor Type	Optical
Resolution	500 dpi
Gray Scale	256 level

2" Printer(58mm)

Printing Method	Thermal dot printing
Number of Dots	384 dots/line
Resolution	8 dots/mm(203 dpi)
Print Size	58mm*40mm
Max Printing Speed	70 mm/s
Physical/Weight	89.8mm(L)*82.7mm(W)*76.7mm(H)/254g



F310-11 Smart ECR Module

M60

Operating System Android 14	Sensor G-Sensor
Processor Quad-Core 4*A53@2.0GHz	Keys/Buttons Power Key, Volume +/- Key
Memory 3GB RAM + 32GB ROM	Physical 245.8mm(L)*165.2mm(W)*113mm(H)
Display 10.1 inch, HD IPS LCD 1280*800Pixel Multi-touch	Environment Operating Temperature: -10°C ~ 50°C(14°F~122°F) Storage Temperature: -20°C ~ 70°C(-4°F~158°F) Relative Humidity: 5%-96%(Non-Condensing)
Camera Front: 8MP AF	Certifications 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card CE, ROHS, WEEE, UN38.3

Base Bracket

Printer	Thermal printer, Paper size: 58mm*60mm
Camera	0.3M FF, Support 1D/2D barcode
Interface	Type A*3(USB2.0 Host), RJ11*1(Cash drawer), RJ12*1(Cash drawer), RJ45(LAN 100M)*1, Audiojack*1, Type C*1(debug), DC Jack*1, Fiscal module(USB/URAT)*1
Audio	3W
Key/Button	Power Key*1
Physical	328mm(L)*245.8mm(W)*272.2mm(H)(Horizontal screen) /328mm(L)*166mm(W)*350mm(H)(Vertical screen)
Card Slot	SIM*2+TF card*1(up to 1TB)+PSAM*1(Refuse the F310 P)
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 24V DC/2.5A
Accessories	Adapter*1, DC Cable(only charging)*1, Manual*1
Certifications	CE, ROHS, WEEE, UN38.3
Adjustable Angle	138°
Payment Module	F310 P






F310-17A Desktop Stand

Face Recognition Camera 16MP AF, Support 1D/2D, Face recognition
Optional: 5MP AF

Stand

Interface	Type C*1(USB2.0), Type C*1(5V2A), RJ45*1(LAN, 100M)
Stand Height	335mm~431mm
Base Diameter	130mm
Inclination	-10°~45°
Revolve	-170°~170°
Physical/Weight	130mm(L)*130mm(W)*335~431mm(H)/585g

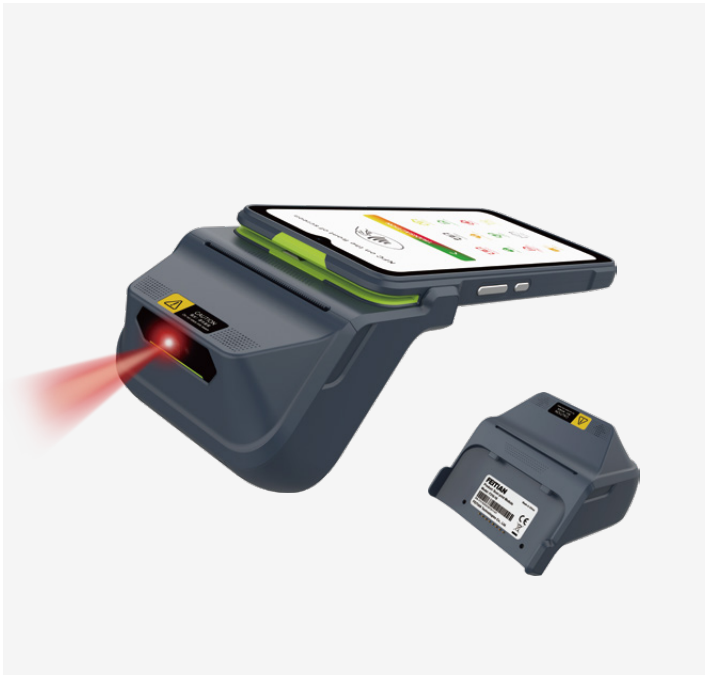

F310-18 Scanner Printer Module

Scanner

Motion Tolerance	High motion tolerance(6 m/s)
Max Image Speed	Maximum image capture rate of 120 fps
Scan Modes	Support 1D, 2D barcode and OCR

2" Printer(58mm)

Printing Method	Thermal dot printing
Number of Dots	384 dots/line
Resolution	8 dots/mm(203 dpi)
Max Printing Speed	70 mm/s
Print Size	58mm*40mm
Physical/Weight	91.4mm(L)*89.8mm(W)*76.7mm(H)/112g



F310-19 Wireless Charging Module

Charging Power	10W
Charging Method	Magnetic Wireless Charging
Physical/Weight	173mm(L)*82.5mm(W)*19.5mm(H)/311.5g



F310-20 Handheld Palm Vein Recognition Module

Working Distance	5cm~12cm
Resolution/Frame Rate	RGB/IR: 720*1024/25 FPS
Indoor and Outdoor Scenes	Typical illuminance range 0-50, 000lux
Physical /Weight	104.2mm(L)*89.8mm(W)*25.2mm(H)/105g

F360 Payment Android POS



reddot winner 2024



F360 Accessories



F360 Unattended



F360 Multi Dock(Charging+Printer)



F360 Customer Display+Printer



F360 Sound Dock



F360 Mini-Unattended

SPECIFICATIONS

Operating System	Android 13
Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 2GB + ROM: 16GB (optional: RAM 1GB+ROM 8GB)
Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4&5GHz, Bluetooth 5.0/BLE
Location	GPS, BDS, Galileo, GLONASS, QZSS, SBAS
Display	3.2 inch, IPS LCD, 320*240 Pixel, Two Point-touch
Camera	Front: 0.3MP FF, Support 1D/2D barcode
Battery	3.7V/2000mAh
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Key/Button	Power Key
Light Strip	Three-color Light, Customizable color
Audio	1W
Card Slot	Nano SIM*1 + PSAM*1
Peripheral Ports	Type C*1 (USB2.0, OTG), Pogopin*1(8PIN)
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Physical/Weight	Φ98.5mm*22.9mm (H)/186.6g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 70°C (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Adapter*1, USB Cable (only charging)*1, Manual*1
Certifications	PCI, EMV L1/L2, EMV Contactless L1, PayWave, Paypass, Pure, Amex, Discover, qUICS, JCB, AuspayNET, EFT POS, NSICCS, RUPAY, RoHS, TQM, CE, FCC, MIC, JATE, ANRT, CMC, BIS, WPC, NTRA-VOC, WEEE, GSMA, CB, DGM, UN38.3, MSDS



F360-2 Unattended

Card Slot	Nano SIM*1 + PSAM*1
Interface	RS232-A*1(RJ45), RS232-B*1(RJ45), LAN*1(RJ45), PWRDIG.I/O*1, MDB-M EXE*1, MDB-S*1, 4G SMA*1, Type A*1, Type C*1(USB2.0, OTG)
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 12V-48V DC/2.0A
Physical	134mm(L)*134mm(W)*60mm(H)
Weight	496.5g

F360-3 Multi Dock(Charging+Printer)

Interface	RJ11*1(Cash Drawer), DC Jack*1(Charging), RJ45*1(LAN 100M), Type A*1(USB 2.0 OTG), Type B*1(RS232), Pogopin*1(8PIN)
WiFi/BT	Wi-Fi 4, Bluetooth 5.0/BLE
Keys/Buttons	Power Key, Volume+/- Key, Function Key
Audio	4Ω3W
Accessories	Adapter*1, USB Cable(only charging)*1, Manual*1
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 12V DC/3.0A

Printer Module

Printing Method	Thermal dot printing
Number of Dots	384 dots/line
Resolution	8 dots/mm(203 dpi)
Paper Size	58mm*60mm
Max Printing Speed	80 mm/s
Physical/Weight	146mm(L)*125mm(W)*105mm(H)/349g



F360-4 Customer Display+Printer Dock

Interface	RJ11*1(Cash Drawer), DC Jack*1(Charging), RJ45*1(LAN 100M), Type A*1(USB 2.0 OTG), Type B*1(RS232), Pogopin*1(8PIN)
WiFi /BT	Wi-Fi 4, Bluetooth 5.0/BLE
Print Size	58mm*60mm
Max Printing Speed	80mm/s
Audio	4Ω3W
Customer Display	2.4inch, 240*320 IPS
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 12V DC/3.0A

F360-5 Sound Dock

Interface	Type C*1
Audio	4Ω3W
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5.0V DC/2.0A



F360-7 Mini-Unattended

Interface	COIN(4PIN), MAINBOARD(4PIN), Uart(5PIN), FUNCTION(5PIN), SPK(2PIN), Type A*1, Type C*1(USB2.0, OTG)
Card Slots	Nano SIM *1+Nano PSAM* 1
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V-24V DC/2.0A
Accessorie	Manual*1
Physical	110mm(L)*110mm(W)*39mm(H)



F600

Payment
Android Tablet



F600 FP Fingerprint
Semiconductor capacitive type:
Aratek A400-M, FBI / STQC



F600 FP Fingerprint
Optical type:
Morpho CBM-E3, FBI

SPECIFICATIONS

Operating System	Android 14
Processor	Octa-Core up to A73 @2.0GHz
Memory	RAM: 4GB + ROM: 64GB
Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4&5GHz, Bluetooth 5.1/BLE
Location	GPS, BDS, GLONASS, Galileo, QZSS
Display	8 inch, HD IPS LCD, 1280*800 Pixel, Multi-touch
Cameras	Rear: 8MP AF with Flash LED Front: 5MP FF Support 1D/2D barcode
Battery	3.8V/8000mAh
Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Keys/Buttons	Power Key, Volume+/- Key, Function Key
Card Slot	SIM*2 + PSAM*1
Peripheral Ports	Type C*1 (USB2.0, OTG), Pogopin (12pin)*1, Pogopin (6pin)*1
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Physical	251mm (L)*136mm (W)*15.8mm (H)
Weight	705g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 70°C (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Adapter*1, USB Cable(only charging)*1
Certifications	PCI, EMV L1&L2, EMV Contactless L1, Amex, PayWave, Paypass, Discover, JCB, Pure, qUICS, TQM, MIR, DGM, UN38.3, MSDS, NTRA-VOC, CE, ANRT, CB, GSMA, WEEE, Google Smart Tap



F360-3 Multi Dock



F600 Charging Printer Dock:
F600 + (F600-6) + (F360-3)



Interface	RJ11*1 (Cash Drawer), DC Jack*1 (Charging), RJ45*1 (LAN 100M), Type A*1 (USB 2.0 OTG), Type B*1 (RS232), Pogopin*1 (8PIN)
WiFi/BT	Wi-Fi 4, Bluetooth 5.0/BLE
Paper Size	58mm*60mm
Max Printing Speed	80 mm/s
Audio	4Q3W
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 12V DC/3.0A

F360-4 Customer Display + Printer Dock



F600 Charging Printer Display Dock:
F600 + (F600-6) + (F360-4)



Interface	RJ11*1 (Cash Drawer), DC Jack*1 (Charging), RJ45*1 (LAN 100M), Type A*1 (USB 2.0 OTG), Type B*1 (RS232), Pogopin*1 (8PIN)
WiFi/BT	Wi-Fi 4, Bluetooth 5.0/BLE
Paper Size	58mm*60mm
Max Printing Speed	80 mm/s
Audio	4Q3W
Customer Display	2.4inch, 240*320 IPS
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 12V DC/3.0A

F600-7

F600-7 Smart Multi Dock



F600 Smart Multi Dock:
F600 + (F600-7)



Interface	Type A*2 (USB2.0) , RJ11*1 (4pin), RJ12*1 (6pin), RJ45*1 (LAN), Audiojack*1, Type C*1 (host), DC Jack*1 (4pin)
Customer Display	3.5 inch, TFT, 320*480
Printer	Built-in 80mm thermal printer, Paper roll: ϕ 60mm Auto cutter: equipped, Print speed: 200mm/s
Scanner	Support 1D/2D barcode
NFC Reader	ISO 14443 TypeA and TypeB, ISO 15693
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 24V DC/2.5A

F600-7 Smart Multi Dock (Palm print)



F600 Smart Palm Print Multi Dock:
F600 + (F600-7) + (Palm Print)



Interface	Type A*2 (USB2.0) , RJ11*1 (4pin), RJ12*1 (6pin), RJ45*1 (LAN), Audiojack*1, Type C*1 (host), DC Jack*1 (4pin)
Customer Display	3.5 inch, TFT, 320*480
Printer	Built-in 80mm thermal printer, Paper roll: ϕ 60mm Auto cutter: equipped, Print speed: 200mm/s
Scanner	Support 1D/2D barcode
Palmprint	Support Palmprint recognition
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 24V DC/2.5A

F600-8



F310-1 Printer

F600 Handheld Printer:
F600 + (F600-8) + (F310-1)



Print Size	58mm*40mm
Max Printing Speed	70 mm/s

F310-4 Scanner

F600 Handheld Scanner:
F600 + (F600-8) + (F310-4)



Motion Tolerance	High motion tolerance(6 m/s)
Max Image Speed	Maximum image capture rate of 120 fps
Scan Modes	Support 1D, 2D barcode and OCR

F310-9 Printer+Customer Display

F600 Handheld Printer Display:
F600 + (F600-8) + (F310-9)



Customer Display	LCD 2.4 inch TFT 128*64
Paper Size	58mm*40mm
Max Printing Speed	70 mm/s

F310-10 Printer+Capacitive FP

F600 Handheld Printer Capacitive FP:
F600 + (F600-8) + (F310-10)



2" Printer (58mm)	
Paper Size	58mm*40mm
Max Printing Speed	70 mm/s
Capacitive Fingerprint Module	
Image Size	256*360 Pixel
Image Resolution	508 dpi

F310-12 Optical FP

F600 Handheld Optical FP:
F600 + (F600-8) + (F310-12)



Image Quality Standards	FBI PIV/Mobile ID FAP10/20 compliant
Sensor Type	Optical
Resolution	500 dpi

F310-12P Identification Printer

F600 Handheld Optical FP Printer:
F600 + (F600-8) + (F310-12P)



ID Optical Fingerprint Module

Sensor Type	Optical
Resolution	500 dpi
2" Printer (58mm)	
Print Size	58mm*40mm
Max Printing Speed	70 mm/s

F310-18 Scanner Printer

F600 Handheld Printer Scan:
F600 + (F600-8) + (F310-18)



Scanner

Motion Tolerance	High motion tolerance (6 m/s)
Max Image Speed	Maximum image capture rate of 120 fps
Scan Modes	Support 1D, 2D barcode and OCR
2" Printer (58mm)	
Print Size	58mm*40mm
Max Printing Speed	70 mm/s

F310-20 Handheld Palm Vein Recognition

F600 Handheld Palm Print:
F600 + (F600-8) + (F310-20)



Working Distance	Within the distance of 5cm~12cm
Resolution/Frame Rate	RGB/IR: 720*1024/25 FPS
Indoor and Outdoor Scenes	Typical illuminance range 0-50, 000lux

M60

Android Tablet



SPECIFICATIONS

Operating System	Android 14
Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 3GB + ROM: 32GB
Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA), Wi-Fi 6: 2.4&5GHz, Bluetooth 5.4/BLE
Location	GPS, BDS, GLONASS (Select two from three)
Display	10.1 inch, HD IPS LCD, 1280*800 Pixel, Multi-touch
Cameras	Rear: 8MP AF with Flash LED Front: 8MP AF Support 1D/2D barcode
Battery	3.8V/8000mAh
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Keys/Buttons	Power Key, Volume+/- Key
Audio	1W*2
Fixed on Bracket	4 nuts on the back
Peripheral Ports	Type C*1 (USB2.0, OTG), Back Pogopin*12, Side Pogopin*6
Card Slot	SIM*1 + PSAM*1 + TF card*1 (up to 1TB)
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Physical/ Weight	245.8mm (L)*164.6mm (W)*13mm (H)/662g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 70°C (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Adapter*1, USB Cable (only charging)*1, Manual*1
Certifications	CE, ROHS, WEEE, UN38.3, Google GMS SafetyNet Compliance



F360-3 Multi Dock



M60 Charging Printer Dock:
M60 + (M60-6) + (F360-3)



Interface	RJ11*1 (Cash Drawer), DC Jack*1 (Charging), RJ45*1 (LAN 100M), Type A*1 (USB 2.0 OTG), Type B*1 (RS232), Pogopin*1 (8PIN)
WiFi/BT	Wi-Fi 4, Bluetooth 5.0/BLE
Paper Size	58mm*60mm
Max Printing Speed	80 mm/s
Audio	4Ω3W
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 12V DC/3.0A

F360-4 Customer Display + Printer Dock



M60 Charging Printer Display Dock:
M60 + (M60-6) + (F360-4)



Interface	RJ11*1 (Cash Drawer), DC Jack*1 (Charging), RJ45*1 (LAN 100M), Type A*1 (USB 2.0 OTG), Type B*1 (RS232), Pogopin*1 (8PIN)
WiFi/BT	Wi-Fi 4, Bluetooth 5.0/BLE
Paper Size	58mm*60mm
Max Printing Speed	80 mm/s
Audio	4Ω3W
Customer Display	2.4inch, 240*320 IPS
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 12V DC/3.0A

M60-7 Smart Multi Dock



M60 Smart Multi Dock:
M60 + (M60-7)



Interface	Type A*2 (USB2.0) , RJ11*1 (4pin), RJ12*1 (6pin), RJ45*1 (LAN), Audiojack*1, Type C*1 (host), DC Jack*1 (4pin)
Customer Display	3.5 inch, TFT, 320*480
Printer	Built-in 80mm thermal printer, Paper roll: φ 60mm Auto cutter: equipped, Print speed: 200mm/s
Scanner	Support 1D/2D barcode
NFC Reader	ISO 14443 TypeA and TypeB, ISO 15693
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 24V DC/2.5A

M60-7

M60-7 Smart Multi Dock (Palm print)



M60 Smart Palm Print Multi Dock:
M60 + (M60-7) + (Palm Print)



Interface	Type A*2 (USB2.0) , RJ11*1 (4pin), RJ12*1 (6pin), RJ45*1 (LAN), Audiojack*1, Type C*1 (host), DC Jack*1 (4pin)
Customer Display	3.5 inch, TFT, 320*480
Printer	Built-in 80mm thermal printer, Paper roll: φ 60mm Auto cutter: equipped, Print speed: 200mm/s
Scanner	Support 1D/2D barcode
Palmprint	Support Palmprint recognition
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 24V DC/2.5A

M60-8



F310-1 Printer

M60 Handheld Printer:
M60 + (M60-8) + (F310-1)



Print Size	58mm*40mm
Max Printing Speed	70 mm/s

F310-4 Scanner

M60 Handheld Scanner:
M60 + (M60-8) + (F310-4)



Motion Tolerance	High motion tolerance(6 m/s)
Max Image Speed	Maximum image capture rate of 120 fps
Scan Modes	Support 1D, 2D barcode and OCR

F310-9 Printer+Customer Display

M60 Handheld Printer Display:
M60 + (M60-8) + (F310-9)



Customer Display	LCD 2.4 inch TFT 128*64
Paper Size	58mm*40mm
Max Printing Speed	70 mm/s

F310-10 Printer+Capacitive FP

M60 Handheld Printer Capacitive FP:
M60 + (M60-8) + (F310-10)



2" Printer (58mm)	
Paper Size	58mm*40mm
Max Printing Speed	70 mm/s
Capacitive Fingerprint Module	
Image Size	256*360 Pixel
Image Resolution	508 dpi

F310-12 Optical FP

M60 Handheld Optical FP:
M60 + (M60-8) + (F310-12)



Image Quality Standards	FBI PIV/Mobile ID FAP10/20 compliant
Sensor Type	Optical
Resolution	500 dpi

F310-12P Identification Printer

M60 Handheld Optical FP Printer:
M60 + (M60-8) + (F310-12P)



ID Optical Fingerprint Module

Sensor Type	Optical
Resolution	500 dpi
2" Printer (58mm)	
Print Size	58mm*40mm
Max Printing Speed	70 mm/s

F310-18 Scanner Printer

M60 Handheld Printer Scan:
M60 + (M60-8) + (F310-18)



Scanner

Motion Tolerance	High motion tolerance (6 m/s)
Max Image Speed	Maximum image capture rate of 120 fps
Scan Modes	Support 1D, 2D barcode and OCR
2" Printer (58mm)	
Print Size	58mm*40mm
Max Printing Speed	70 mm/s

F310-20 Handheld Palm Vein Recognition

M60 Handheld Palm Print:
M60 + (M60-8) + (F310-20)



Working Distance	Within the distance of 5cm~12cm
Resolution/Frame Rate	RGB/IR: 720*1024/25 FPS
Indoor and Outdoor Scenes	Typical illuminance range 0-50, 000lux

M200

Unattended
Android POS



SPECIFICATIONS

Operating System	Android 11
Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 2GB + ROM: 16GB
Communication	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4/5GHz, Bluetooth 4.2/BLE
Location	GPS, BDS, GLONASS
Display	5.0 inch, HD IPS LCD, 720*1280 Pixel, Multi-touch
Camera	Front: 2MP FF, Support 1D/2D barcode
Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Card Slot	SIM*2 + PSAM*2
Peripheral Ports	RS232-A*1(RJ45), RS232-B*1(RJ45), LAN*1(RJ45), Type A*1 ,Type C(USB2.0, OTG), 4G SMA*1 , MDB-S*1, MDB-M EXE*1, PWRDIG.I/O*1, HDMI*1, TF-card*1
Adapter	Input: 100-240V AC, 50/60Hz 1.5A Output: 24.0V DC/2.7A
Audio	1W
Physical	146mm (L)*105mm (W)*57mm (H)
Weight	723g
Environment	Operating Temperature: -20°C ~ 70°C (-4°F~158°F) Storage Temperature: -30°C ~ 80°C (-22°F~176°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Adapter*1, USB Cable*1, Manual*1
Certifications	PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, qUICS, JCB, EFT POS, AUSPAY, MIR, Pure, TQM, FCC, CE, RoHS, IP65, IK08, ATEX(Exic II 3G Exic IIB T4 Gc), GSMA, WEEE, CB, NTRA-VOC, DGM, UN38.3, MSDS

F55 Payment DUO POS



F55 Softpos Version



F55 MPOS Version

SPECIFICATIONS

F55 Duo POS

Operating System	Android 14
Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 1GB + ROM: 8GB (optional: RAM 2GB + ROM 16GB)
Communications	4G CAT1(LTE-FDD/LTE-TDD) + 2G(GSM) Optional: 4G CAT4(LTE-FDD/LTE-TDD) + 2G(GSM) Wi-Fi 6: 2.4GHz, Bluetooth 5.2
Location	GPS, BDS, GLONASS
Display	Main Display: 3.2 inch, 240*320 Pixel, IPS LCD, Two Point-touch Sub Display: 2.0 inch, 128*32 Pixel
Camera	Front: 0.3MP FF Support 1D/2D barcode (Optional 2MP FF)
Battery	3.7V/2600mAh
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, ISO18092, Type A&B, Felica, Mifare card, Card emulation
Keys/Buttons	16 Keys: 0 ~ 9 Enter Cancel Clear Power Up Down Touch Button: Menu, Home, Back
Audio	1W
Card Slot	SIM(Nano)*1, PSAM(Nano)*1, Optional eSIM(Only 4G CAT4)
Peripheral Port	Type C*1 Support OTG
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5.0V DC/1.0A
Physical	106mm (L)*76.8mm (W)*27.5mm (H)
Weight	179g
Certifications	PCI 7.X, EMV L1&L2, EMV CL L1, Amex, payWave, PayPass, Discover, qUICS, MIR, JCB, AuspayNET, EFT POS, RUPAY (base 3.2), WEEE, ROHS, CB, BIS, CE, TQM, WPC, NTRA, GSMA, UN38.8+MSDS

Environment Operating Temperature: -10°C ~ 50°C (14°F~122°F), Storage Temperature: -20°C ~ 70°C (-4°F~158°F) ,Relative Humidity: 5%-96% (Non-Condensing)

Accessories Adapter*1, USB Cable (only charging)*1, Manual*1

F55 Softpos Version

Operating System	Android 14
Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 2GB + ROM: 16GB (optional: RAM 3GB + ROM 32GB)
Communications	4G CAT1(LTE-FDD/LTE-TDD) + 2G(GSM) Optional: 4G CAT4(LTE-FDD/LTE-TDD) + 2G(GSM) Wi-Fi 6: 2.4GHz, Bluetooth 5.2
Location	GPS, BDS, GLONASS
Display	3.2 inch, 240*320 Pixel, IPS LCD, Two Point-touch
Camera	Front: 0.3MP FF Support 1D/2D barcode (Optional 2MP FF)
Battery	3.7V/2000mAh
IC Card Reader	NA
NFC	13.56MHz, ISO/IEC 14443, ISO18092, Type A&B, Felica, Mifare card, Card emulation
Keys/Buttons	Touch Button: Menu, Home, Back
Audio	3W
Card Slot	SIM(Nano)*1, PSAM(Nano)*1, Optional eSIM(Only 4G CAT4)
Peripheral Port	Type C*1 Support OTG
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5.0V DC/1.0A
Physical	106mm (L)*76.8mm (W)*27.5mm (H)
Weight	173g
Certifications	WEEE, ROHS, CB, BIS, CE, TQM, WPC, NTRA, GSMA, UN38.8+MSDS, GMS

F55 MPOS Version

Operating System	Android 14
Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 1GB + ROM: 8GB (optional: RAM 2GB + ROM 16GB)
Communications	4G CAT1(LTE-FDD/LTE-TDD) + 2G(GSM) Optional: 4G CAT4(LTE-FDD/LTE-TDD) + 2G(GSM) Wi-Fi 6: 2.4GHz, Bluetooth 5.2
Location	GPS, BDS, GLONASS
Display	2.0 inch, 128*32 Pixel
Camera	NA
Battery	3.7V/1200mAh
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, ISO18092, Type A&B, Felica, Mifare card, Card emulation
Keys/Buttons	16 Keys: 0 ~ 9 Enter Cancel Clear Power Up Down
Audio	1W
Card Slot	SIM(Nano)*1, PSAM(Nano)*1
Peripheral Port	Type C*1 Support OTG
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5.0V DC/1.0A
Physical	106mm (L)*76.8mm (W)*27.5mm (H)
Weight	172g
Certifications	PCI 7.X, EMV L1&L2, EMV CL L1, Amex, payWave, PayPass, Discover, qUICS, MIR, JCB, AuspayNET, EFT POS, RUPAY (base 3.2), WEEE, ROHS, CB, BIS, CE, TQM, WPC, NTRA, GSMA, UN38.8+MSDS

ePayPOS600



SPECIFICATIONS

Operating System	RTOS
Processor	32-bit RISC Core
Memory	RAM: 128KB + ROM: 4MB
Display	1.4 inch, 128*64 Pixel, Mono
Bluetooth	BT4.2 (BR/EDR+BLE)
Battery	3.7V/500mAh (optional: 300mAh)
Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Keys/Buttons	5*3 PIN pad 15 keys
Audio	Buzzer
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5.0V DC/1.0A
Peripheral Port	Micro USB 2.0
Physical	113.6mm (L)*59mm (W)*14mm (H)
Weight	80g
Environment	Operating Temperature: 0°C ~ 45°C (32°F~113°F) Storage Temperature: -10°C ~ 60°C (14°F~140°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	USB Cable (only charging)*1, Manual*1
Certifications	PCI, EMV L1&L2, EMV Contactless L1, PayWave, Paypass, Amex, Discover, JCB, Pure, qUICS, Rupay, MIR, TQM, CE, FCC, BIS, ANRT, WPC, PBOC3.0 L1&CL2, PBOC3.0 CL1, DGM, UN38.3, MSDS

T20

Payment
Linux POS



SPECIFICATIONS

Operating System	Linux
Processor	Dual-Core 2*A53@1.3GHz
Memory	RAM: 256MB + ROM: 512MB
Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 4: 2.4GHz, Bluetooth 4.2/BLE
Location	GPS, GLONASS
Display	3.5 inch, TFT, 240*320 Pixel
Camera	Rear: 0.3MP FF, Support 1D/2D barcode
Printer	High-speed thermal printer, Paper size: 58mm*40mm
Battery	3.7V/5200mAh
Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Keys/Buttons	19Keys: 0~9 Up Down Power on/off F1 F2 F3 Cancel Enter Clear
Peripheral Port	Type C*1 (USB2.0, OTG)
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Physical	198.2mm (L)*80.7mm (W)*53.6mm (H)
Weight	410g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 70°C (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Adapter*1, USB Cable (only charging)*1, Manual*1
Certifications	PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, Pure, qUICS, CE, TQM, DGM, UN38.3, MSDS, GSMA, WEEE, NTRA-VOC

T50 Payment Android Pinpad



SPECIFICATIONS

Operating System	Android 14
Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 1GB + ROM: 8GB
BT + WIFI	Bluetooth 5.2/BLE, Wi-Fi 6: 2.4Ghz
Display	2.4 inch, TFT, 240*320 Pixel
Camera	0.3MP FF, Support 1D/2D barcode
Magnetic Card Reader	ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping
IC Card Reader	ISO/IEC 7816, Conform to EMV L1/L2
NFC	13.56MHz, ISO/IEC 14443, Type A&B
Keys/Buttons	16 Keys: 0 ~ 9 Enter Clear Cancel Function Up Down
Audio	1W
Card Slot	PSAM*2
Peripheral Ports	USB*2
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Physical	151.4mm (L)*80.5mm (W)*56.1mm (H)
Weight	235g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 70°C (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Adapter*1, Manual*1
Certifications	PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, Pure, MIR, qUICS, TQM, CE, NTRA-VOC, ANRT, WEEE, DGM, UN38.3, MSDS

F100 Non-Payment Android POS



SPECIFICATIONS

Operating System	Android 11
Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 2GB + ROM: 16GB
Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4&5GHz, Bluetooth 5.0/BLE
Location	GPS/A-GPS, GLONASS, BDS, Galileo
Display	5.0 inch, HD IPS LCD, 1280*720 Pixel, Multi-touch
Camera	Rear: 8MP AF with Flash LED, Support 1D/2D barcode
Printer	Thermal printer, Paper size: 58mm*40mm
Battery	3.8V/4000mAh
Keys/Buttons	Power Key, Volume+/-Key
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Card Slot	SIM*2 + TF Card*1
Peripheral Ports	Type C*1 (USB2.0, OTG), 3.5mm Audio Jack*1
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Audio	1W
Physical	197mm (L)*77mm (W)*52.6mm (H)
Weight	323g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 70°C (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Adapter*1, USB Cable (only charging)*1, Manual*1
Certifications	CE, ANRT, EAC, FAC, CB, BIS, WPC, DGM, UN38.3, MSDS, GSMA, Google GMS SafetyNet Compliance

V11 Identification Terminal



SPECIFICATIONS

Operating System	Android 11
Processor	Quad-Core 4*A43@2.0GHz
Memory	RAM: 3GB + ROM: 32GB
Communications	4G (LTE-FDD/LTE-TDD) + 3G (WCDMA) + 2G (GSM), Wi-Fi 5: 2.4&5GHz, Bluetooth 4.2/BLE
Location	GPS/A-GPS, BDS, GLONASS
Display	5.0 inch, HD IPS LCD 1280*720 Pixel, Multi-touch
Cameras	Rear: 8MP AF with Flash LED Front: 5MP FF Support 1D/2D barcode
GMS	Support Google mobile services
Battery	3.8V/5000mAh
SoftPOS	Support FT PAY (Feitian softPOS)
IC Card Reader	ISO/IEC 7816
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Card Slot	Micro SIM*1 + PSAM*2 + TF card(up to 128GB)
Peripheral Port	Type C*1(USB2.0, OTG)
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Physical	204.5mm (L)*80.6mm (W)*24.6mm (H)
Weight	327g
Environment	Operating Temperature: 0°C ~ 60°C (0°F~140°F) Storage Temperature: -20°C ~ 85°C (-4°F~185°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Adapter*1, USB Cable*1, Hand strap*1

Certifications	CE, UN38.3
----------------	------------

F310A

Non-Payment
Android POS

Google Mobile Service 



NFC Only



IC CARD+NFC



Top Scanner Optional

Compatible with all accessories for F310 Payment

SPECIFICATIONS

Operating System	Android 14
Processor	Quad-Core 4*A53@2.0GHz
Memory	RAM: 2GB + ROM: 16GB
Communications	4G (LTE-FDD/LTE-TDD) + 2G (GSM) Wi-Fi 6: 2.4&5GHz, Bluetooth 5.2/BLE
Location	GPS, BDS, GLONASS (Select two from three)
Display	6.5 inch, HD IPS LCD, 1600*720 Pixel, Multi-touch
Cameras	Rear: 8MP AF with Flash LED Front: 2MP FF Support 1D/2D barcode
Battery	3.8V/3000mAh
NFC	13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card
Keys/Buttons	Power Key, Function Key, Volume+/- Key
Audio	1W
Peripheral Ports	Type C*1 (USB2.0, OTG), Pogopin (6PIN)*1, Pogopin (8PIN)*1
Card Slot	SIM*1 + PSAM*1 + TF card*1 (up to 1TB)
Adapter	Input: 100-240V AC, 50/60Hz 0.35A Output: 5V DC/2.0A
Physical/ Weight	173mm (L)*82.5mm (W)*17.2mm (H)/278g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 70°C (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Adapter*1, USB Cable (only charging)*1, Manual*1
Certifications	CE, FCC, VOC, WEEE, GSMA, RoHS, UN38.3, MSDS, Google GMS SafetyNet Compliance

M300/M500

Android ECR Cash Register



M300



M500



M300 Options



M500 Options



M300 with PIN PAD T50



M500 with PIN PAD T50



SPECIFICATIONS

Operating System	Android 11	
Processor	Quad-Core 4*A55@2.0GHz	
Memory	RAM: 2GB + ROM: 16GB	
Ethernet	LAN 100M	
Bluetooth	BT4.2 (BR/EDR+BLE)	
WIFI	2.4GHz/5GHz, 802.11 b/g/n/ac	
Display	15.6" (1920*1080)+15.6" (1920*1080) CTP /Multi-touch	
Printer	M300	Not Available
	M500	Paper size:80mm*80mm /Print speed: Up to 200mm/s
Peripheral Ports	Type A*5, RJ11*1, RJ12*1, DC*1, RJ45*1, 3.5mm Audio Jack*1	
Key/Button	Power Key	
Audio	3W	
Adapter	Input: 100-240V AC, 50/60Hz 2.0A Output: 24.0V DC/2.75A	
Card Slot	TF Card*1	
Environment	Operating Temperature: -10℃ ~ 50℃ (14°F~122°F) Storage Temperature: -20℃ ~ 70℃ (-4°F~158°F) Relative Humidity: 5%-96% (Non-Condensing)	
Physical	M300	382mm (L)*190mm (W)*352mm (H)
	M500	382mm (L)*190mm (W)*400mm (H)
Accessories	Adapter*1, Manual*1	
Certifications	CE, RoHS, WEEE, NTRA-VOC, ANRT	

M8

Static QR Sound Box



SPECIFICATIONS

Processor	ARM V8-M RTOS, 500Mhz
Memory	RAM: 4MB + ROM: 4MB
Communications	4G (FDD-LTE: B1/B3/B5/B8, TDD-LTE: B34/B38/B39/B40/B41)
Audio	4Ω/3W
Keys/Buttons	Power Key, Volume+/- Key, Function Key, Reset
Peripheral Port	Micro USB
Indicator	Red, green, and blue indicator
Battery	3.7V/1200mAh
Card Slot	SIM*1
Power	Support 5V-1A power adapter input
Physical	80mm (L)*28mm (W)*66mm (H) With QR Code Bracket: 90mm (L)*60.62mm (W)*80.3mm (H)
Weight	123g
Environment	Operating Temperature: 0°C ~ 60°C (32°F~144°F) Storage Temperature: -20°C ~ 60°C (-4°F~140°F) Storage Relative Humidity: 5%-96% (Non-Condensing)
Certifications	BIS

M10

Static QR Sound Box



Display(optional)
Six-digit Segment Display Screen

SPECIFICATIONS

Processor	Cortex-R5 RTOS
Memory	RAM: 4MB + ROM: 4MB
Communications	4G (FDD-LTE: B1/B3/B5/B7/B8/B20, TDD-LTE: B38/B40/B41) (optional: Wi-Fi 4: 2.4GHz)
Audio	4Ω/3W
Keys/Buttons	Power Key, Volume+/- Key, Function Key, Reset
Peripheral Port	Type C*1
Indicator	Red, green, and blue indicator
Battery	3.7V/2000mAh
Card Slot	SIM*1
Power	Support 5V-1A power adapter input
Physical	132mm (L)*65mm (W)*73mm (H) With QR Code Bracket: 132mm(L)*65mm(W)*181mm(H)
Weight	223g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 60°C (-4°F~140°F) Relative Humidity: 5%-96% (Non-Condensing)

M20

Dynamic QR Sound Box



SPECIFICATIONS

Processor	Cortex-R5 RTOS
Memory	RAM: 8MB + ROM: 8MB
Communications	4G (FDD-LTE: B1/B3/B5/B8, TDD-LTE: B34/B38/B39/B40/B41) (optional: Wi-Fi 4: 2.4GHz)
Display	2.4 inch, TFT, 240*320 Pixel
Audio	4Ω/3W
Keys/Buttons	Power Key, Volume+/- Key, Function Key, Reset
Peripheral Port	Type C*1
Indicator	Red, green and blue indicator
Battery	3.7V/2000mAh
Card Slot	SIM*1
Keyboard	Buttons: with 0-9/00 number keys, function key, cancel key, enter key, etc Display: Segment code display, can display the amount of payment, network status, etc
Power	Support 5V-1A power adapter input
Physical	90mm (L)*90mm (W)*116mm (H)
Weight	210g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 60°C (-4°F~140°F) Relative Humidity: 5%-96% (Non-Condensing)

M80 IoT PayBOX
CPM(Consumer Presented Mode)




System	Linux
Processor	ARM Cortex-A7 Dual core CPU
Memory	RAM: 64MB + ROM: 128MB
Communications	Wi-Fi 6: 2.4&5GHz
Display	2.8 inch IPS, Touch Screen
Scan	High motion tolerance Support mainstream one-dimensional and two-dimensional code systems
Protocol	MQTT
Supporting Peripherals	Coin dispensers, Game consoles, Gift devices, Scanning devices
LED	Colorful high brightness indicator light
Audio	1.5W
Other physical interfaces	12pin (Power input, pulse input/output, debug serial port)
Power	5.0-24.0V DC/2.0A
Physical/Weight	72mm (L)*82.5mm (W)*18mm (H)/83g
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 60°C (-4°F~140°F) Relative Humidity: 5%-96% (Non-Condensing)
Accessories	Wiring box, Installation bracket
Certifications	TELEC

F76 IoT PayBOX
MPM(Merchant Presented Mode)



System	RTOS
Processor	32-bit processor, 240MHz
Memory	RAM: 320KB + ROM: 4MB
Communications	WiFi 2.4GHz
Protocol	MQTT
Peripheral Ports	Pulse I/O*3, UART*2
Supporting Peripherals	Coin dispensers, Game consoles, Gift devices, Scanning devices
LED	Red, green and blue indicator
Power	9.0-24.0V DC/1.0A
Physical/Weight	71.5mm (L)*66mm (W)*17mm (H)/62g (Without antenna)
Environment	Operating Temperature: -10°C ~ 50°C (14°F~122°F) Storage Temperature: -20°C ~ 60°C (-4°F~140°F) Relative Humidity: 5%-96% (Non-Condensing)
Certifications	TELEC

PayBOX IoT Cloud Platform

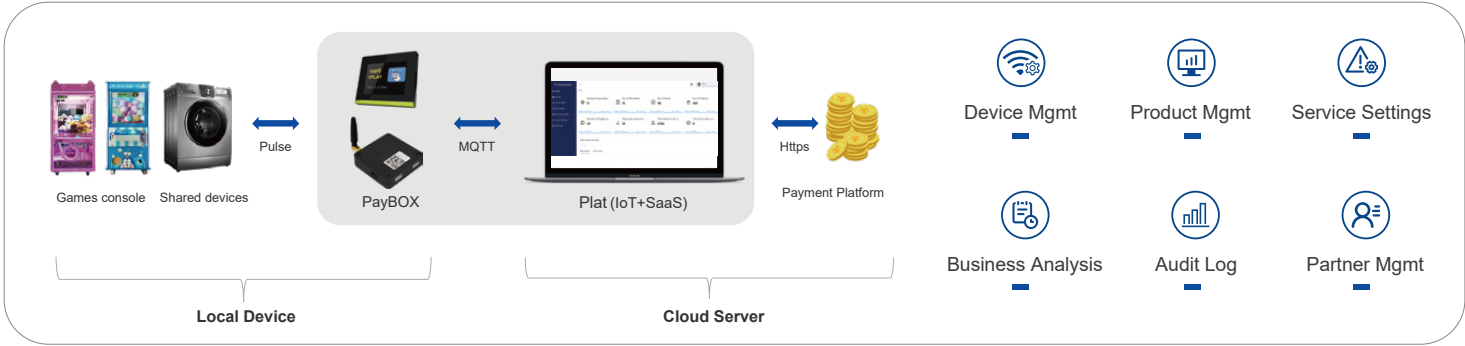

Charging Cradle

F20 Charging Cradle



Multi Dock

Ports	Type C*1, RJ45*1, RJ11*1, Type A*2, Scanner*1
Pogo Pin	8 pin
Certification	CE, RoHS



Multi Dock Lite

Ports	Type C*1, RJ45*1, RJ11*1, Type A*2
Pogo Pin	8 pin
Certification	CE, RoHS

F100 Charging Cradle



Charging Cradle

Input	USB Type C 5V/2A
Pogo Pin	2 pin
Certification	CE, RoHS

F210 Charging Cradle



Charging Cradle

Input	USB Type C 5V/2A
Pogo Pin	2 pin
Certification	CE, RoHS



Charging Cradle

Input	USB Type C 5V/2A
Pogo Pin	2 pin
Certification	CE, RoHS



Multi-function Battery Cover

Ports	Type C*1, RJ45*1
Pogo Pin	8 pin
Certification	CE, RoHS



Multi-function Dock Lite

Ports	Type C*1, RJ11*1, RJ45*1, USB Type A*2
Pogo Pin	5 pin
Certification	CE, RoHS



Multi-function Dock Lite (optional WiFi 5GHz version available)

Ports	Type C*1, RJ11*1, RJ45*1, USB Type A*2
Pogo Pin	6 pin
Certification	CE, RoHS

Bracket


F20 Bracket  A black stand with a circular base and a vertical pole. A smartphone is mounted on a bracket at the top, tilted slightly forward. The screen shows a colorful interface with various app icons.	F100 Bracket  A black stand with a circular base and a vertical pole. A smartphone is mounted on a bracket at the top, tilted slightly forward. The screen shows a colorful interface with various app icons.
F210 Bracket  A black stand with a circular base and a vertical pole. A smartphone is mounted on a bracket at the top, tilted slightly forward. The screen shows a colorful interface with various app icons.	T20 Bracket  A black stand with a circular base and a vertical pole. A smartphone is mounted on a bracket at the top, tilted slightly forward. The screen shows a colorful interface with various app icons.

F310 P Bracket  A black stand with a circular base and a vertical pole. A smartphone is mounted on a bracket at the top, tilted slightly forward. The screen shows a QR code.	T50 Bracket  A black stand with a circular base and a vertical pole. A smartphone is mounted on a bracket at the top, tilted slightly forward. The screen shows a colorful interface with various app icons.
F600 Desktop Rotating Bracket  A black stand with a circular base and a vertical pole. A tablet is mounted on a bracket at the top, tilted slightly forward. The screen shows a colorful interface with various app icons.	F600 Wall-mounted Rotating Bracket  A black stand with a wall-mounted bracket and a vertical pole. A tablet is mounted on a bracket at the top, tilted slightly forward. The screen shows a colorful interface with various app icons.

Silicone Covers (Customized colors)

F20 	F100 	F210 
F310 P  Button Silicon Cover Silicon Cover Printer Silicon Cover		
F300 	F360 	F600 

Screen Protector (Hydrogel film)

F20 	F100 	F210 	F600 
F300 	F310 P 	T20 	T50 

Printer

P10



Printing Technology	Thermal printing
Paper Width	58mm*50mm
Print Speed	60-90 mm/s
Print Life	50KM
Interface	USB+ Bluetooth
Power Adapter	Type-C, DC 5V/1A
Lithium Battery	1800mAh/7.4V
Operating System	Android, IOS, Windows
Dimensions	112mm(L)*81mm(W)*56mm(H)
Certification	CE

P50



Printing Technology	Thermal printing
Paper Width	48mm~80mm±0.5mm
Print Speed	300 mm/s
Print Life	150KM
Interface	USB+RS232+RJ45+RJ11 USB+BT+RJ11(Optional) USB+WiFi+RJ11(Optional) USB+WiFi+BT+RJ11(Optional)
Cutters	Automatic Cutter
Power Adapter	DC 24V/2.5A
Operating System	Android, IOS, Windows
Dimensions	140mm(L)*178mm(W)*130mm(H)
Certification	CE

P60



Printing Technology	Thermal printing
Paper Width	58mm*60mm
Print Speed	80 mm/s
Print Life	150KM
Interface	WiFi+BT+RJ45
Cutters	Manual Cutter
Power Adapter	DC12V/3A
Operating System	Android, IOS, Windows
Dimensions	146mm(L)*125mm(W)*105mm(H)
Certification	CE

Barcode Scanner/Cash Box

F26



Scan Modes	Trigger /Auto-sense /Continuous
Scanning Accuracy	≥4 mil/0.1mm (PCS90%, CODE39)
Size(L*W*H)	Scanner 165mm*60mm*84mm
Certification	CE, FCC, ROHS

F68



Scan Modes	Manual /Auto-sense
Scanning Accuracy	≥5 mil/0.127m (PCS90%, CODE39)
Size(L*W*H)	Scanner 150mm*70mm* 95mm
Certification	CE, FCC, ROHS

Electronic Scale



Display	5*8 digits LCD display
Pan Size	344.9mm*262.4mm
Maximum Weighing	76/15kg, 15/30kg
Certification	CE

FT-405D



Size(W*L*H)	405*420*110mm
Bill Width	84/87/85/85mm
Coin Width	80/84/84/81mm
Certification	CE, FCC, ROHS, EMC

FTA-300



Size(W*L*H)	300*360*80mm
Bill Width	81.8/81.8/84.2mm
Coin Width	71.6/56/56/56.8mm
Certification	CE, ROHS

FTA-200



Size(W*L*H)	335*368*80mm
Bill Width	78/73/73/70mm
Coin Width	Coin Width 61/165mm
Certification	CE, ROHS

FT SmartPay



FT SMARTPAY

Android Merchant/Cashier Application

A standard, flexible, stable Android payment application (APK format), with a complete bank card transaction capacity, mobile payment capacity and value-added features.



EMV UPI Visa MasterCard AMEX JCB Discover MIR/RuPay/PURE/NSIC CS	Key Methods MK/SK DUKPT	Key Loading Device Manual Input From IC Card Download From STORM Download From Bank Acquirer System	Card Operation Type Contact ICC Contactless ICC Magnetic Stripe Cards	Parameters Config Local Config Import FromSDCard Download From STORM Download From Bank Acquirer System
Store Manager Inventory Staff Supplier Purchase Expense Loyalty /Rewards	Code/Mobile Payments POS Scan Customer Customer Scan POS Inquiry Refund Cancel Coupon Scan	Printer Support Local Printer BT Printer IP Printer(ESC/POS)	Payment Types Cash/Card/Mobile Payments Alipay Instalments Tips Offline Sales ECR Payments	Others Topup/Evouchers Bill Payments ON US Cards Multi Language mPOS and POS Support Android Smart Phone Support ECR Support

Business Management in One APP

- Customer loyalty Program
- Purchase
- Inventory
- Report
- Supplier Management
- Pre-Auth
- Expense
- User Management
- Order History
- Card Balance
- Reconciliation

Omnichannel Payment in One APP

Cash

Bank Card

QR Code


3rd Party Wallet

FT SmartPay Compatibility for L3 Payment Certification

Supported Protocols: Nexio/ISO8583/Hypercom/TLV Messaging/MQTT



FT SmartPay Mobile Payment Compatibility

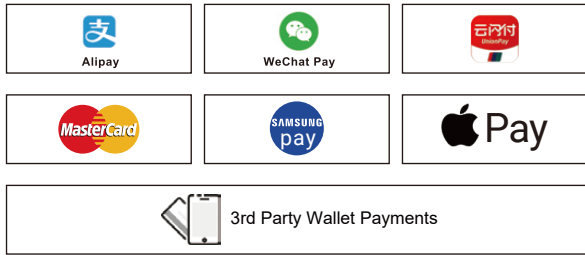



FTPAY

Turn Your Smartphone into a Smart Payment Terminal

The innovative SoftPOS solution that empowers you to take payments on-the-go. With FTPAY, you can easily turn your smartphone or tablet into a powerful payment terminal, accepting payments securely and efficiently.

Key Features



02. Mobility and Flexibility

Transform any NFC-enabled smartphone or tablet into a fully functional POS system, empowering businesses to accept payments anytime, anywhere.



01. Secure and Contactless Payments


Our SoftPOS application enables businesses to accept payments securely and conveniently through contactless technology, enhancing customer safety and reducing transaction time.




03. Seamless Integration


With seamless integration capabilities, the FTPAY SoftPOS application effortlessly syncs with existing payment infrastructure and systems, streamlining operations for businesses of all sizes.

FTPAY Architecture

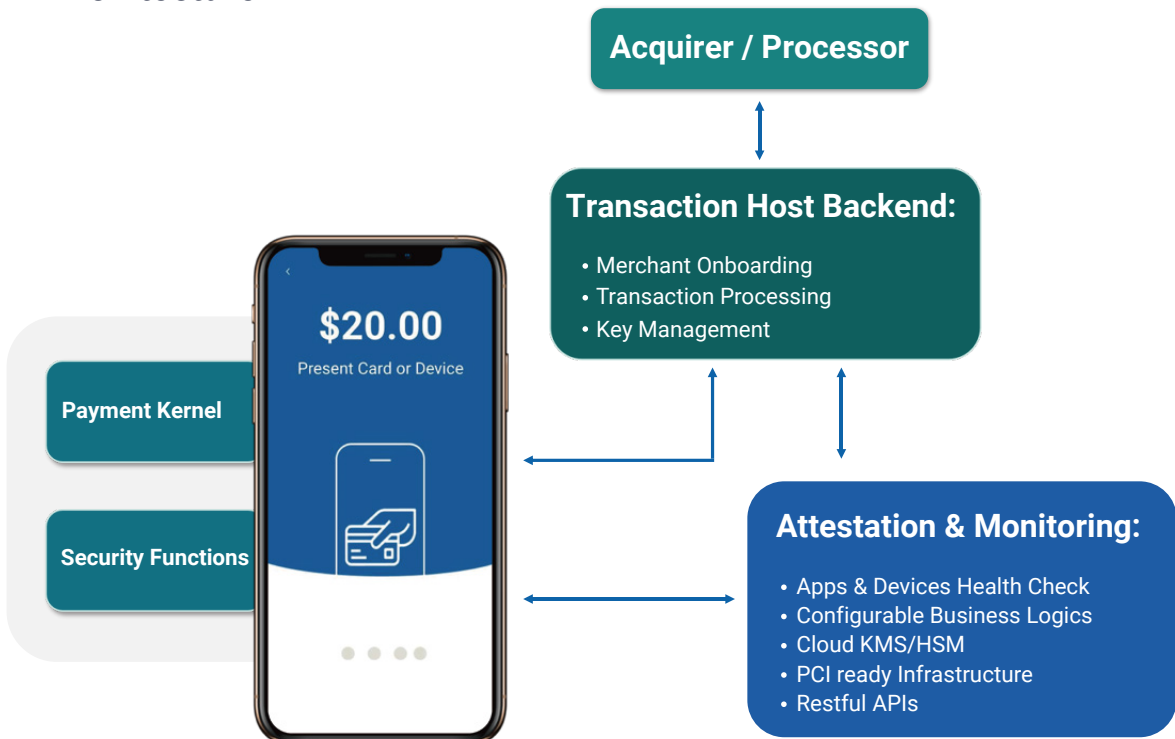

FTPAY Security

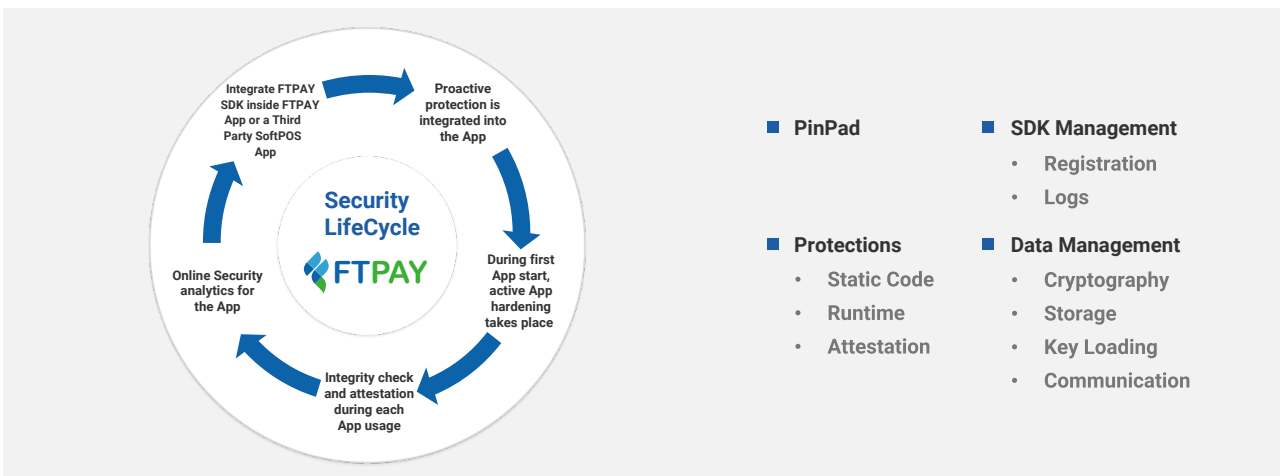



FT STORM

Smart Terminal Operations Remote Manager

The next generation TMS platform realizes the management of traditional POS, Android Smart Phones, Android POS and Mobile POS via one platform.



STORM-TMS

Marketing Manager

Transaction Manager

Key Manager

System Manager

Application Manager

Device Manager

Omni Channels

Support Android Phones for MDM Functions

Web

Android

Omni POS

Any Android POS

Traditional POS

Any mPOS

STORM-TMS Security Compliance

AWS CloudHSM

PCI Security Standards Council

MY HSM by utimaco

nexo STANDARDS

Strong Password Enforcement

Instant Lock/Unlock Features

Remote Wipe Out

OS Update Management

FRP Deactivation

Factory Reset Block

Robust combination of technology & cloud services to cater the evolving market

FT Cloud Cashier




FT CLOUD CASHIER


Revolutionize Retail with Cloud-Powered Cash Register Solutions

FT Cloud Cashier streamlines in-store transactions and integrates seamlessly with Feitian's POS and SmartPay solutions to enhance operational efficiency, security, and customer experience.


FT Cloud Cashier in Retail Scenarios

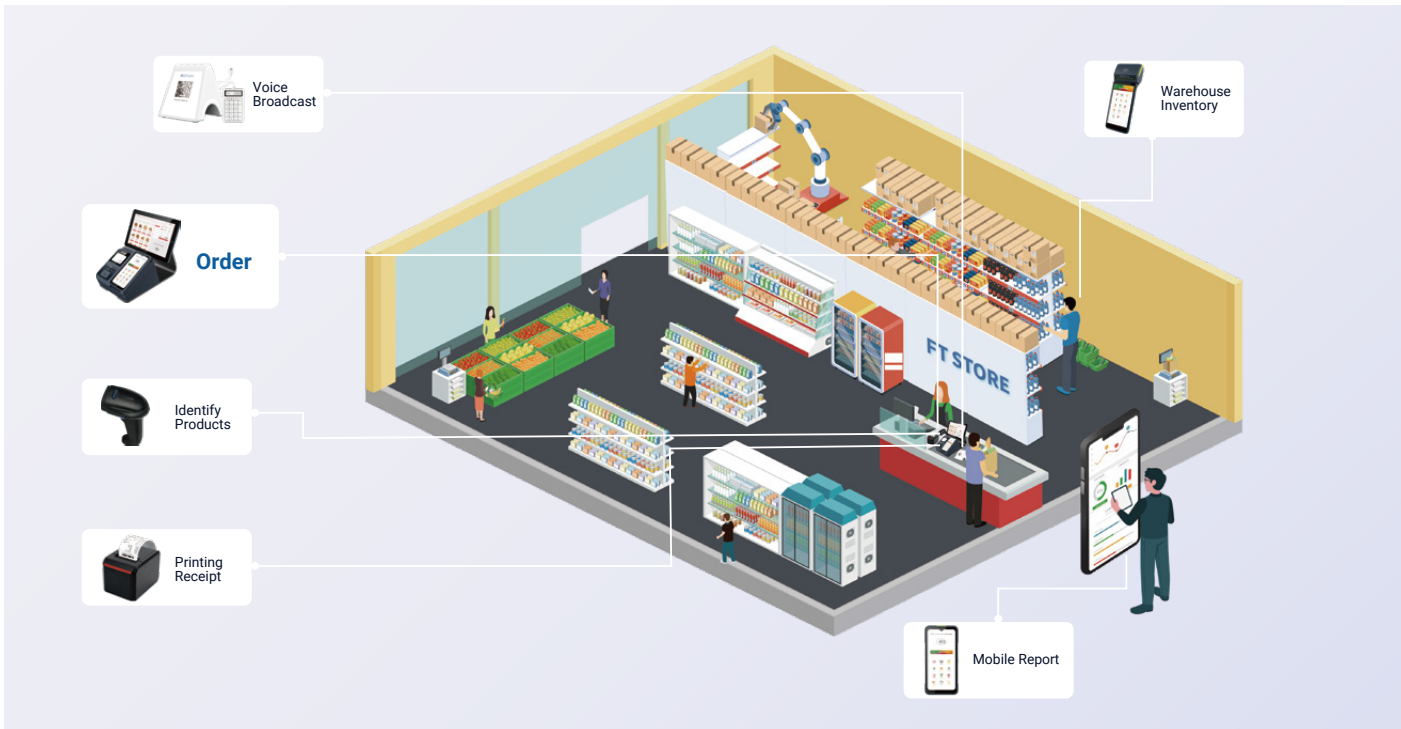

Seamlessly integrates with your existing setup, whether **Android, Windows, or Feitian POS** devices

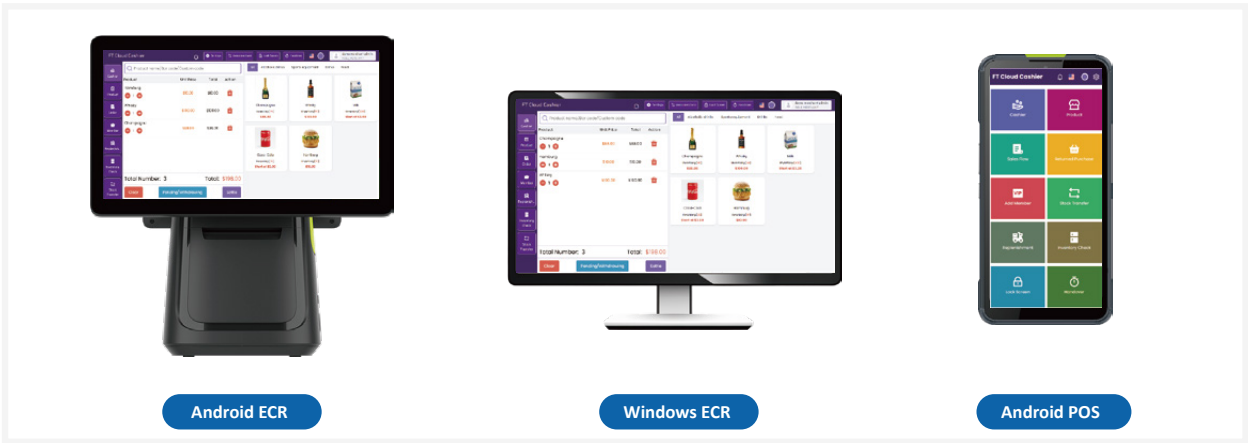


Accelerate sales with an intuitive, 3-step checkout process

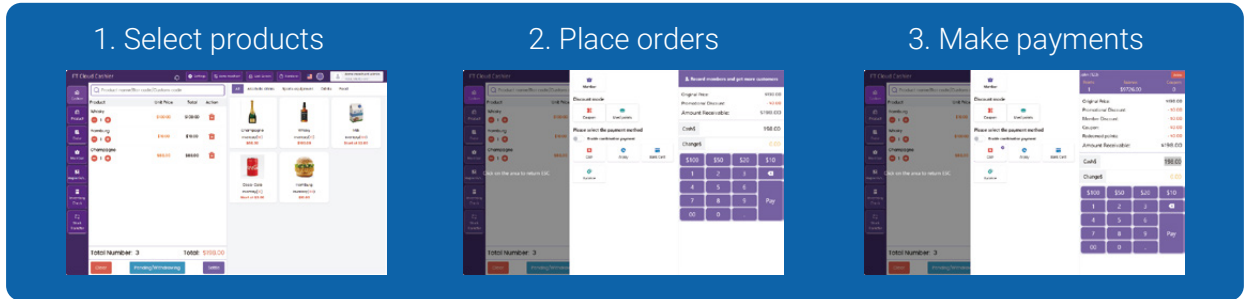

Merchant Management Platform

Manage your business from any device, anytime, anywhere

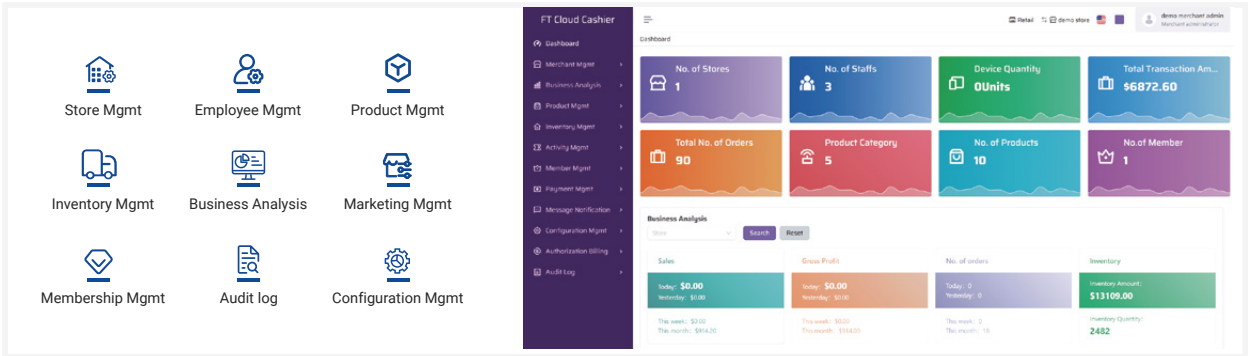





FT STORE

Empowering Developers and Merchants at Every Point of Sales

FT Store connects developers and merchants, offering a dynamic platform to create, sell, and deploy applications seamlessly on Feitian's devices.

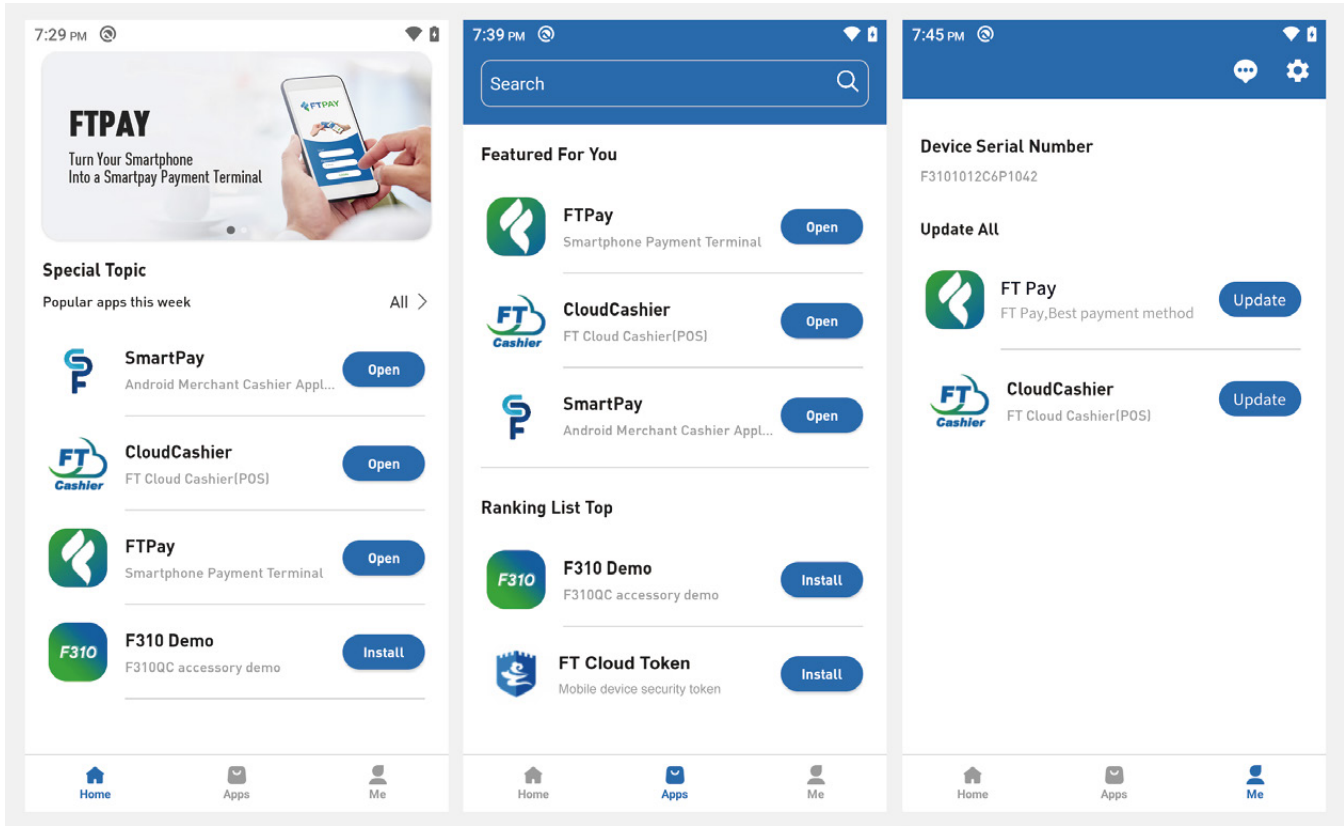

Ensuring secure, seamless application distribution services for trusted merchant

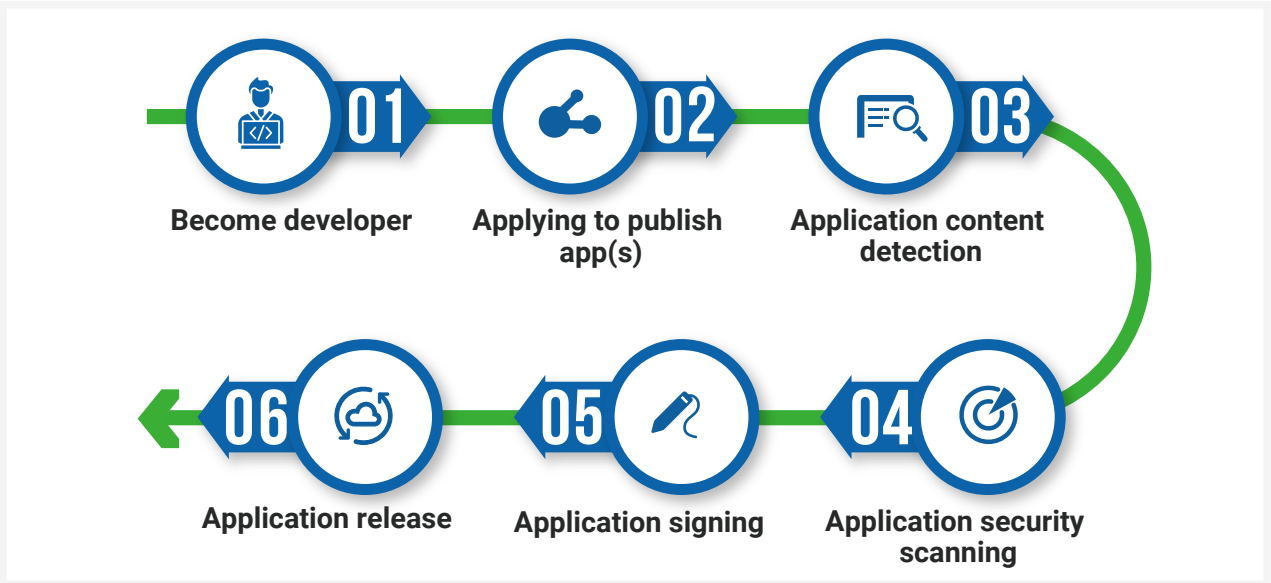

Empowering Your Business with Diverse and Flexible Options

 Helping partners grow together Empowering developers and merchants at every point of sales to receive continuous rewards.	 Diversified service options On demand service: paying for service fee as required to empower your business with diverse and flexible options.	 Customization and personalization Personalized recommendation function configuration to enhance customer experience and empower your business.	 Data security and privacy protection Encryption technology protect the security of application data during transmission and storage to solve customer concerns and promote orders.
--	--	---	---

FT BRIDGE



FT BRIDGE

Seamlessly Connecting Payment Terminals to Cash Registers

Simplify the process of connecting Feitian payment terminals to any cash register

With FT BRIDGE, our partners can seamlessly integrate their payment smart terminals with various cash register models, regardless of the connectivity options.

FT BRIDGE Architecture

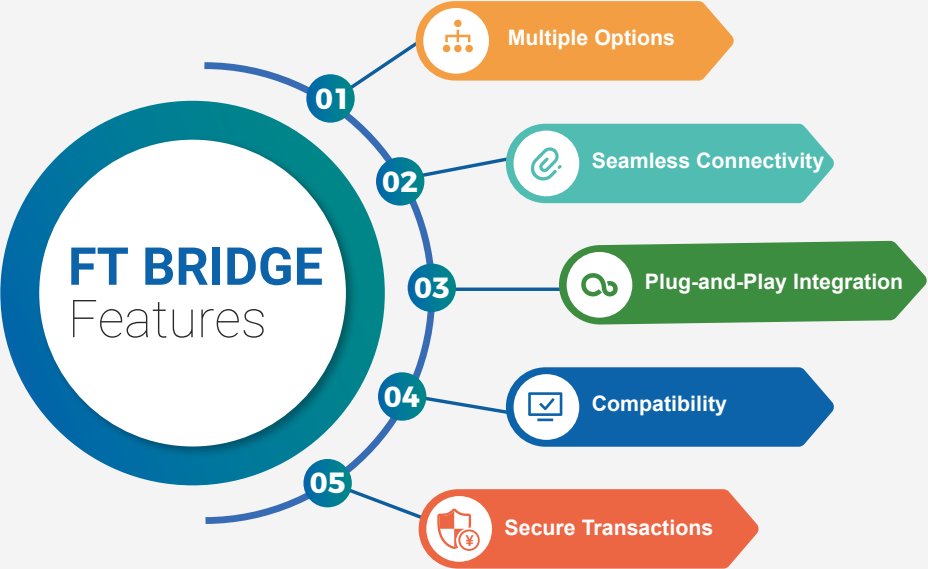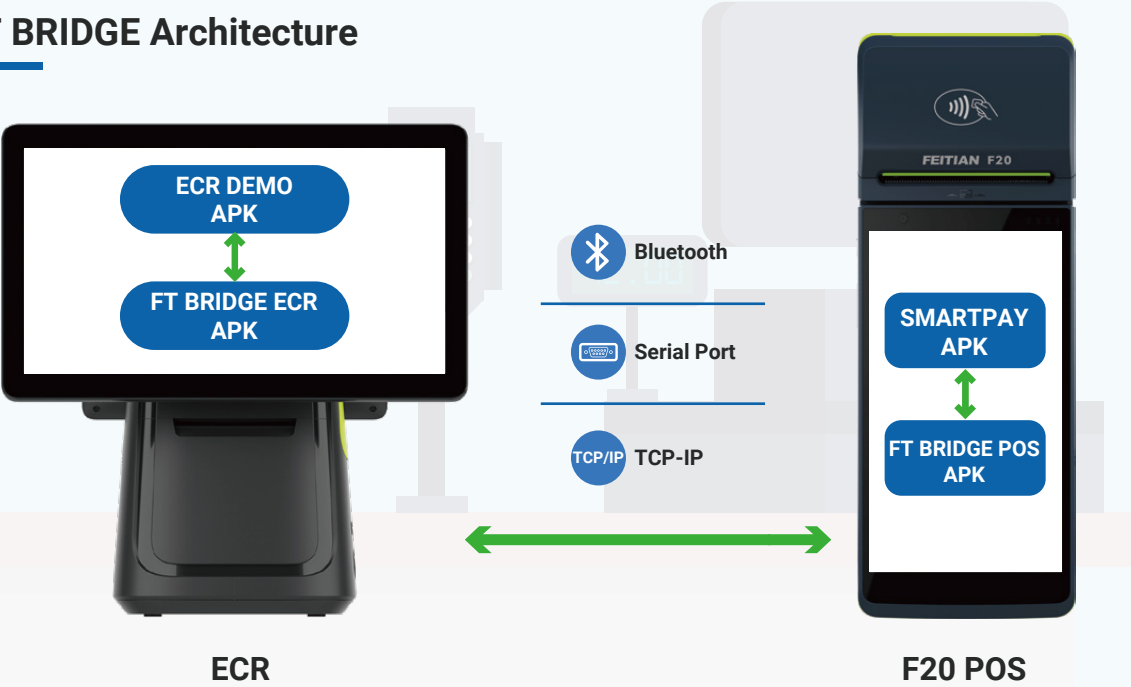

Enrollment Process

