

# FEITIAN



## FEITIAN Technologies Co., Ltd.

Stock Code: 300386.SZ

Tel: +86 10 62304466

Email: sales-support1@ftsafes.com

Web: [www.ftsafes.com/payment](http://www.ftsafes.com/payment)

Add: Tower B, Huizhi Building, No. 9 Xueqing Road,  
Haidian District, 100085, Beijing, China



This document is provided to you for informational purposes only. All features and specifications are subject to change without notice.  
FEITIAN and the FEITIAN logo are either trademarks or registered trademarks of FEITIAN Technologies Co., Ltd. in China and/or other countries.  
All other trademarks or brand names are the properties of their respective holders. © 2025 FEITIAN Technologies Co., Ltd. All rights reserved.



# About FEITIAN



**Founded**  
in 1998



**HQ: Beijing**  
6 branches  
11 offices



**700+**  
employees  
R&D >400



**800+**  
patents



**3000+**  
customers



**60M+ pcs**  
per year



**Stock Code**  
300386.SZ



ISO9001



ISO14001



ISO27001



ISO45001



CMMI LEVEL3





# Production Facility

9,398 m<sup>2</sup>  
Total Area

6,166 m<sup>2</sup>  
Plant Area

1,589 m<sup>2</sup>  
Office Area

1,643 m<sup>2</sup>  
Dormitory Area

## Production Output

- ✓ 5 Million/Year Payment POS
- ✓ 45 Million/Year Chip Cards
- ✓ 50 Million/Year Power Cards

# F20 Payment Android POS



F20 FP Fingerprint



F20 Fiscal

## SPECIFICATIONS

| F20                  |                                                                                                                                                                                                                                                                                                     | F20 <sup>[U]</sup>   |                                                                          |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------------------------------------------------------|
| Operating System     | Android 14                                                                                                                                                                                                                                                                                          | Operating System     | Android 12                                                               |
| Processor            | Quad-Core 4*A53@2.0GHz                                                                                                                                                                                                                                                                              | Processor            | Quad-Core 4*A53@1.4GHz                                                   |
| Memory               | 2GB RAM + 32GB ROM                                                                                                                                                                                                                                                                                  | Memory               | 1GB RAM + 8GB ROM (optional: 2GB + 16GB)                                 |
| Communications       | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4&5GHz, Bluetooth 5.0/BLE                                                                                                                                                                                                                                               | Communications       | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4GHz(optional: 5GHz),<br>Bluetooth 4.2/BLE   |
| Location             | GPS, BDS, Galileo, GLONASS, QZSS, SBAS                                                                                                                                                                                                                                                              | Location             | GPS, BDS, GLONASS/Galileo                                                |
| Display              | 5.5 inch, HD IPS LCD, 720 *1440 Pixel, Multi-touch                                                                                                                                                                                                                                                  | Display              | 5.5 inch, HD IPS LCD, 720*1280 Pixel, Multi-touch                        |
| Cameras              | Rear: 8MP AF with Flash LED<br>Front: 2MP FF<br>Support 1D/2D barcode                                                                                                                                                                                                                               | Camera               | Rear: 2MP FF with Flash LED<br>Support 1D/2D barcode                     |
| Printer              | High-speed thermal printer, Paper size: 58mm*40mm                                                                                                                                                                                                                                                   | Printer              | High-speed thermal printer, Paper size: 58mm*40mm                        |
| Battery              | 7.6V/2500mAh (Equal to 3.8V/5000mAh)                                                                                                                                                                                                                                                                | Battery              | 7.6V/2500mAh (Equal to 3.8V/5000mAh)                                     |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3,<br>Bi-directional swiping                                                                                                                                                                                                                                  | Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3,<br>Bi-directional swiping       |
| IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                                                                                                                                                                  | IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                       |
| NFC                  | 13.56MHz, ISO/IEC 14443, IEC/ISO 18092, Type A&B,<br>Felica, Mifare card                                                                                                                                                                                                                            | NFC                  | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B,<br>Felica, Mifare card |
| Card Type            | SIM*2 + PSAM*1 (Optional: eSIM*1 + SIM*1 + PSAM*1)                                                                                                                                                                                                                                                  | Card Type            | SIM*2 + PSAM*1                                                           |
| Peripheral Port      | Type C*1 (USB2.0, OTG)                                                                                                                                                                                                                                                                              | Peripheral Port      | Type C*1 (USB2.0, OTG)                                                   |
| Adapter              | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 5V DC/2.0A                                                                                                                                                                                                                                             | Adapter              | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 5V DC/2.0A                  |
| Physical             | 212.6mm (L)*79.1mm (W)*51.9mm (H)                                                                                                                                                                                                                                                                   | Physical             | 212.6mm (L)*79.1mm (W)*51.9mm (H)                                        |
| Weight               | 427g                                                                                                                                                                                                                                                                                                | Weight               | 427g                                                                     |
| Environment          | Operating Temperature: -10°C ~ 50°C (14°F~122°F), Storage Temperature: -20°C ~ 70°C (-4°F~158°F), Relative Humidity: 5%-96% (Non-Condensing)                                                                                                                                                        |                      |                                                                          |
| Accessories          | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                                                                                                                                                                                    |                      |                                                                          |
| Certifications       | PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, JCB, Pure, qUICS, Rupay, NSICCS, TQM, CSPACE, AuspayNET, EFT POS, INTERAC, NAPAS, RoHS, CE, FCC, PTCRB, EAC, BIS, ATEX, WEEE, CB, WPC, DGM, UN38.3, MSDS, NTRA-VOC, GSMA, Telec, JATE, ANRT, CMC, Google Smart Tap, RNIB, EAA |                      |                                                                          |

# F210

Payment  
Android POS



F210 FP Fingerprint

## SPECIFICATIONS

|                      |                                                                                                                                                                                                                                                 |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System     | Android 12                                                                                                                                                                                                                                      |
| Processor            | Quad-Core 4*A53@1.4GHz                                                                                                                                                                                                                          |
| Memory               | 1GB RAM + 8GB ROM (optional: 2GB + 16GB)                                                                                                                                                                                                        |
| Communications       | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4GHz (optional: 5GHz), Bluetooth 4.2/BLE                                                                                                                                                                            |
| Location             | GPS, BDS, GLONASS/Galileo                                                                                                                                                                                                                       |
| Display              | 5.0 inch, IPS LCD, 480*854 Pixel,<br>Multi-touch                                                                                                                                                                                                |
| Camera               | Rear: 2MP FF with Flash LED Support 1D/2D barcode<br>(optional: Rear: 8MP AF with Flash LED Front: 2MP FF Support 1D/2D barcode)                                                                                                                |
| Printer              | Thermal printer,<br>Paper size: 58mm*40mm                                                                                                                                                                                                       |
| Battery              | 3.7V/5200mAh                                                                                                                                                                                                                                    |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping                                                                                                                                                                                 |
| IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                                                                                                              |
| NFC                  | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                                                                                                                           |
| Card Type            | SIM*2 + PSAM*1 + TF Card*1 (up to 256GB)<br>(Optional: eSIM*1 + SIM*1 + PSAM*1 + TF Card*1)                                                                                                                                                     |
| Peripheral Port      | Type C*1 (USB2.0, OTG)                                                                                                                                                                                                                          |
| Adapter              | Input: 100-240V AC, 50/60Hz 0.35A      Output: 5V DC/2.0A                                                                                                                                                                                       |
| Physical             | 197mm (L)*82.1mm (W)*52.5mm (H)                                                                                                                                                                                                                 |
| Weight               | 410g                                                                                                                                                                                                                                            |
| Environment          | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing)                                                                                                |
| Accessories          | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                                                                                                                                |
| Certifications       | PCI, EMV L1&L2, EMV Contactless L1, Amex, PayWave, Paypass, Discover, JCB, Pure, qUICS, MIR, Rupay, NTRA-VOC, WEEE, CE, FCC, CB, CMC, GSMA, TQM, ANRT, CCC, SRRC, Nal Certificate, UPTS3.0, PBOC3.0 L1&CL1, PBOC3.0 CL2, DGM, UN38.3, MSDS, WPC |



# F300

Payment  
Android POS



F300 Back Clip Scanner

## SPECIFICATIONS

|                      |                                                                                                                                                                                                                                   |                    |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| Operating System     | Android 14                                                                                                                                                                                                                        |                    |
| Processor            | Quad-Core 4*A53@2.0GHz                                                                                                                                                                                                            |                    |
| Memory               | 2GB RAM + 32GB ROM                                                                                                                                                                                                                |                    |
| Communications       | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4&5GHz, Bluetooth 5.0/BLE                                                                                                                                                                             |                    |
| Location             | GPS, BDS, Galileo, GLONASS, QZSS, SBAS                                                                                                                                                                                            |                    |
| Display              | 4.0 inch, IPS LCD, 480*800 Pixel, Multi-touch                                                                                                                                                                                     |                    |
| Camera               | Rear: 2MP FF with Flash LED<br>Support 1D/2D barcode                                                                                                                                                                              |                    |
| Battery              | 3.8V/2800mAh (Built-in battery)                                                                                                                                                                                                   |                    |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping                                                                                                                                                                   |                    |
| IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                                                                                                |                    |
| NFC                  | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                                                                                                             |                    |
| Card Type            | SIM*1 + SIM/PSAM*1 (Optional: eSIM*1 + SIM*1 + PSAM*1)                                                                                                                                                                            |                    |
| Peripheral Port      | Type C*1 (USB2.0, OTG)                                                                                                                                                                                                            |                    |
| Adapter              | Input: 100-240V AC, 50/60Hz 0.35A                                                                                                                                                                                                 | Output: 5V DC/2.0A |
| Audio                | 1W                                                                                                                                                                                                                                |                    |
| Physical             | 135.5mm (L)*65mm (W)*16.5mm (H)                                                                                                                                                                                                   |                    |
| Weight               | 174g                                                                                                                                                                                                                              |                    |
| Environment          | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing)                                                                                  |                    |
| Accessories          | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                                                                                                                  |                    |
| Certifications       | PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, JCB, Amex, Discover, Pure, qUICS, Rupay, AuspayNET, EFT POS, NSICCS, TQM, WPC, CE, FCC, ANRT, CB, CMC, RoHS, BIS, DGM, UN38.3, MSDS, NTRA-VOC, GSMA, Google Smart Tap, WEEE |                    |

F310 P

Payment  
Android POS



MSR + IC CARD + NFC



NFC



IC CARD + NFC

SPECIFICATIONS

| F310 P               |                                                                                                                                                                                          | F310 P [RK]          |                                                                                                         |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------|
| Operating System     | Android 13                                                                                                                                                                               | Operating System     | Android 14                                                                                              |
| Processor            | Quad-Core 4*A53@2.0GHz                                                                                                                                                                   | Processor            | Quad-Core 4*A53@2.0GHz                                                                                  |
| Memory               | 2GB RAM + 16GB ROM                                                                                                                                                                       | Memory               | 2GB RAM + 32GB ROM                                                                                      |
| Communications       | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4&5GHz, Bluetooth 5.0/BLE                                                                                                                                    | Communications       | 4G + 2G,<br>Wi-Fi 6: 2.4&5GHz, Bluetooth 5.4/BLE                                                        |
| Location             | GPS, BDS, Galileo, GLONASS, QZSS, SBAS                                                                                                                                                   | Location             | GPS, BDS, GLONASS (Select two from three)                                                               |
| Display              | 6.5 inch, HD IPS LCD, 720*1600 Pixel, Multi-touch                                                                                                                                        | Display              | 6.5 inch, HD IPS LCD, 720*1600 Pixel, Multi-touch                                                       |
| Cameras              | Rear: 8MP AF with Flash LED<br>Front: 2MP FF<br>Support 1D/2D barcode                                                                                                                    | Cameras              | Rear: 8MP AF with Flash LED<br>Front: 2MP FF<br>Support 1D/2D barcode                                   |
| Battery              | 3.8V/3000mAh                                                                                                                                                                             | Battery              | 3.8V/3000mAh                                                                                            |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping                                                                                                                          | Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping                                         |
| IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                                                       | IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                      |
| NFC                  | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                                                                    | NFC                  | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                   |
| Keys/Buttons         | Power Key, Function Key, Volume+/- Key                                                                                                                                                   | Keys/Buttons         | Power Key, Function Key, Volume+/- Key                                                                  |
| Sensor               | Proximity Sensor (P-Sensor), Light Sensor (L-Sensor)                                                                                                                                     | Sensor               | Proximity Sensor (P-Sensor), Light Sensor (L-Sensor)                                                    |
| Audio                | 1W                                                                                                                                                                                       | Audio                | 1W                                                                                                      |
| Card Type            | SIM*1 + PSAM*2 or SIM*2 + PSAM*1, TF card*1 (up to 1TB) (Optional: eSIM*1 + SIM*1 + PSAM*1 + TF Card*1)                                                                                  | Card Type            | SIM*1 + PSAM*2 or SIM*2 + PSAM*1, TF card*1 (up to 1TB) (Optional: eSIM*1 + SIM*1 + PSAM*1 + TF Card*1) |
| Peripheral Ports     | Type C*1 (USB2.0, OTG), Pogopin (6PIN)*1, Pogopin (8PIN)*1                                                                                                                               | Peripheral Ports     | Type C*1 (USB2.0, OTG), Pogopin (6PIN)*1, Pogopin (8PIN)*1                                              |
| Adapter              | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 5V DC/2.0A                                                                                                                                  | Adapter              | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 5V DC/2.0A                                                 |
| Physical             | 173mm (L)*82.5mm (W)*17.2mm (H)                                                                                                                                                          | Physical             | 173mm (L)*82.5mm (W)*17.2mm (H)                                                                         |
| Weight               | 278g                                                                                                                                                                                     | Weight               | 278g                                                                                                    |
| Environment          | Operating Temperature: -10°C ~ 50°C (14°F~122°F), Storage Temperature: -20°C ~ 70°C (-4°F~158°F), Relative Humidity: 5%-96% (Non-Condensing)                                             |                      |                                                                                                         |
| Accessories          | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                                                                         |                      |                                                                                                         |
| Certifications       | PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, JCB, Pure, qUICS, TQM, MIR, EFT POS, RoHS, CE, FCC, WEEE, CB, DGM, UN38.3, MSDS, NTRA-VOC, GSMA, Telec, JATE, RNIB |                      |                                                                                                         |



F310-1 Printer Module

|                    |                                   |
|--------------------|-----------------------------------|
| Printing Method    | Thermal dot printing              |
| Number of Dots     | 384 dots/line                     |
| Resolution         | 8 dots/mm(203 dpi)                |
| Paper Size         | 58mm*40mm                         |
| Max Printing Speed | 70 mm/s                           |
| Physical /Weight   | 89.8mm(L)*82.7mm(W)*76.7mm(H)/97g |



F310-2 Unattended

|                 |                                                                                                                              |
|-----------------|------------------------------------------------------------------------------------------------------------------------------|
| Card Slot       | SIM*1 + PSAM*2 or SIM*2 + PSAM*1                                                                                             |
| Interface       | RS232-A*1(RJ45), RS232-B*1(RJ45), LAN*1(RJ45), PWRDIG.I/O*1, MDB-M EXE*1, MDB-S*1, 4G SMA*1, Type A*1, Type C*1(USB2.0, OTG) |
| Adapter         | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 12V-48V DC/2.0A                                                                 |
| Physical/Weight | 195.7mm(L)*101mm(W)*64.2mm(H)/565g                                                                                           |



F310-3 5000mAh Battery Module

|                 |                                   |
|-----------------|-----------------------------------|
| Battery         | 3.8V/5000mAh                      |
| Physical/Weight | 173mm(L)*81mm(W)*26.4mm(H)/439.5g |

F310-8 Fiscal Battery Cover

|                 |                                                                          |
|-----------------|--------------------------------------------------------------------------|
| Fiscal Module   | USB/37.15mm(L)*15.70mm(W)*6.40mm(H)<br>UART/30mm(L)*29.95mm(W)*9.40mm(H) |
| Battery         | 3.8V/3000mAh                                                             |
| Physical/Weight | 173mm(L)*81mm(W)*26.4mm(H)/388.5g                                        |



F310-4 Scanner Module

|                  |                                       |
|------------------|---------------------------------------|
| Motion Tolerance | High motion tolerance(6 m/s)          |
| Max Image Speed  | Maximum image capture rate of 120 fps |
| Scan Modes       | Support 1D, 2D barcode and OCR        |
| Physical/Weight  | 209.2mm(L)*85.1mm(W)*81.1mm(H)/33.5g  |





F310-5 Rugged Device

|                           |                                       |
|---------------------------|---------------------------------------|
| Ingress Protection Rating | IP66                                  |
| Drop Height               | 1.8m                                  |
| Scanner(optional)         |                                       |
| Motion Tolerance          | High motion tolerance(6 m/s)          |
| Max Image Speed           | Maximum image capture rate of 120 fps |
| Scan Modes                | Support 1D, 2D barcode and OCR        |
| Physical/Weight           | 191.5mm(L)*95.4mm(W)*32.5mm(H)/440g   |

2" Printer(58mm)(optional)

|                    |                      |
|--------------------|----------------------|
| Printing Method    | Thermal dot printing |
| Number of Dots     | 384 dots/line        |
| Paper Size         | 58mm*40mm            |
| Max Printing Speed | 70 mm/s              |



F310-6 Charging Cradle

|                 |                                           |
|-----------------|-------------------------------------------|
| Ports           | Type C*1, RJ45*1, Type A*2, RJ11*1(RS232) |
| Physical/Weight | 159.6mm(L)*100mm(W)*51mm(H)/180g          |



F310-9 Printer+Customer Display Module

|                    |                                    |
|--------------------|------------------------------------|
| Printer Screen     | LCD 2.4 inch, 240*320 IPS          |
| 2" Printer(58mm)   |                                    |
| Printing Method    | Thermal dot printing               |
| Number of Dots     | 384 dots/line                      |
| Resolution         | 8 dots/mm(203 dpi)                 |
| Paper Size         | 58mm*40mm                          |
| Max Printing Speed | 70 mm/s                            |
| Physical/Weight    | 89.8mm(L)*86.2mm(W)*76.7mm(H)/146g |



F310-10 Printer+Capacitive FP Module

|                    |                      |
|--------------------|----------------------|
| 2" Printer(58mm)   |                      |
| Printing Method    | Thermal dot printing |
| Number of Dots     | 384 dots/line        |
| Resolution         | 8 dots/mm(203 dpi)   |
| Paper Size         | 58mm*40mm            |
| Max Printing Speed | 70 mm/s              |

Capacitive Fingerprint Module

|                  |                                    |
|------------------|------------------------------------|
| Image Size       | 256*360 Pixel                      |
| Image Resolution | 508 dpi                            |
| Sensor Type      | Semiconductor capacitive           |
| Physical/Weight  | 89.8mm(L)*91.7mm(W)*76.7mm(H)/147g |

# F310 P Accessories



## F310-12 Optical FP Module

### ID Optical Fingerprint Module

|                         |                                      |
|-------------------------|--------------------------------------|
| Image Quality Standards | FBI PIV/Mobile ID FAP10/20 compliant |
| Sensor Type             | Optical                              |
| Resolution              | 500 dpi                              |
| Gray Scale              | 256 level                            |
| Physical/Weight         | 115mm(L)*89.8mm(W)*25.2mm(H)/107g    |

## F310-12P Identification Printer Module

### ID Optical Fingerprint Module

|                         |                             |
|-------------------------|-----------------------------|
| Image Quality Standards | FBI PIV/Mobile ID compliant |
| Sensor Type             | Optical                     |
| Resolution              | 500 dpi                     |
| Gray Scale              | 256 level                   |

### 2" Printer(58mm)

|                    |                                    |
|--------------------|------------------------------------|
| Printing Method    | Thermal dot printing               |
| Number of Dots     | 384 dots/line                      |
| Resolution         | 8 dots/mm(203 dpi)                 |
| Print Size         | 58mm*40mm                          |
| Max Printing Speed | 70 mm/s                            |
| Physical/Weight    | 89.8mm(L)*82.7mm(W)*76.7mm(H)/254g |



## F310-11 Smart ECR Module

### Display (Model Name: M60)

|                                                                |                                                                                                                                                              |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System<br>Android 14                                 | Sensor<br>G-Sensor                                                                                                                                           |
| Processor<br>Quad-Core 4*A53@2.0GHz                            | Keys/Buttons<br>Power Key, Volume +/- Key                                                                                                                    |
| Memory<br>4GB RAM + 32GB ROM                                   | Physical<br>245.8mm(L)*165.2mm(W)*113mm(H)                                                                                                                   |
| Display<br>10.1 inch, HD IPS LCD 800*1280 Pixel<br>Multi-touch | Environment<br>Operating Temperature: -10°C ~ 50°C(14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C(-4°F~158°F)<br>Relative Humidity: 5%-96%(Non-Condensing) |
| Camera<br>Front: 8MP AF                                        | Certifications<br>13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card<br>CE, ROHS, WEEE, UN38.3                                            |

### Base Bracket

|                  |                                                                                                                                                       |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Printer          | Thermal printer, Paper size: 58mm*60mm                                                                                                                |
| Camera           | 0.3M FF, Support 1D/2D barcode                                                                                                                        |
| Interface        | Type A*3(USB2.0 Host), RJ11*1(Cash drawer), RJ12*1(Cash drawer), RJ45(LAN 100M)*1, Audiojack*1, Type C*1(debug), DC Jack*1, Fiscal module(USB/URAT)*1 |
| Audio            | 3W                                                                                                                                                    |
| Key/Button       | Power Key*1                                                                                                                                           |
| Physical         | 328mm(L)*245.8mm(W)*272.2mm(H)(Horizontal screen) /328mm(L)*166mm(W)*350mm(H)(Vertical screen)                                                        |
| Card Type        | SIM*2+TF card*1(up to 1TB)+PSAM*1(Refuse the F310 P)                                                                                                  |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 24V DC/2.5A                                                                                              |
| Accessories      | Adapter*1, Manual*1                                                                                                                                   |
| Certifications   | CE, ROHS, WEEE, UN38.3                                                                                                                                |
| Adjustable Angle | 138°                                                                                                                                                  |
| Payment Module   | F310 P                                                                                                                                                |




F310-17A Desktop Stand

**Face Recognition Camera** F310 P(NO MSR),16MP AF, Support 1D/2D, Face recognition  
Optional: 5MP AF

Stand

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| Interface       | Type C*1(USB2.0), Type C*1(5V3A), RJ45*1(LAN, 100M) |
| Stand Height    | 335mm~431mm                                         |
| Base Diameter   | 130mm                                               |
| Inclination     | -10°~45°                                            |
| Revolve         | -170°~170°                                          |
| Physical/Weight | 130mm(L)*130mm(W)*335~431mm(H)/585g                 |

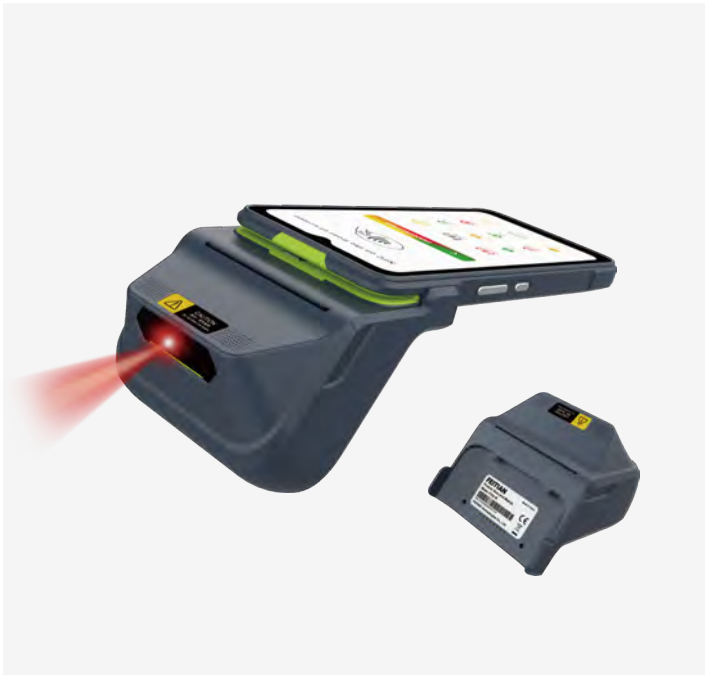

F310-18 Scanner Printer Module

Scanner

|                  |                                       |
|------------------|---------------------------------------|
| Motion Tolerance | High motion tolerance(6 m/s)          |
| Max Image Speed  | Maximum image capture rate of 120 fps |
| Scan Modes       | Support 1D, 2D barcode and OCR        |

2" Printer(58mm)

|                    |                                    |
|--------------------|------------------------------------|
| Printing Method    | Thermal dot printing               |
| Number of Dots     | 384 dots/line                      |
| Resolution         | 8 dots/mm(203 dpi)                 |
| Max Printing Speed | 70 mm/s                            |
| Print Size         | 58mm*40mm                          |
| Physical/Weight    | 91.4mm(L)*89.8mm(W)*76.7mm(H)/112g |



F310-19 Wireless Charging Cover

|                 |                                     |
|-----------------|-------------------------------------|
| Charging Power  | 10W                                 |
| Charging Method | Magnetic Wireless Charging          |
| Physical/Weight | 173mm(L)*82.5mm(W)*19.5mm(H)/311.5g |



F310-20 Handheld Palm Vein Recognition Module

|                           |                                        |
|---------------------------|----------------------------------------|
| Working Distance          | 5cm~12cm                               |
| Resolution/Frame Rate     | RGB/IR: 720*1024/25 FPS                |
| Indoor and Outdoor Scenes | Typical illuminance range 0-50, 000lux |
| Physical /Weight          | 104.2mm(L)*89.8mm(W)*25.2mm(H)/105g    |



# F360 Payment Android POS



reddot winner 2024



### F360 Accessories



F360 Unattended



F360 Multi Dock(Charging+Printer)



F360 Customer Display+Printer



F360 Sound Dock



F360 Mini-Unattended

## SPECIFICATIONS

|                  |                                                                                                                                                                                                                                                                       |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System | Android 13                                                                                                                                                                                                                                                            |
| Processor        | Quad-Core 4*A53@2.0GHz                                                                                                                                                                                                                                                |
| Memory           | 2GB RAM + 16GB ROM                                                                                                                                                                                                                                                    |
| Communications   | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4&5GHz, Bluetooth 5.0/BLE                                                                                                                                                                                                                 |
| Location         | GPS, BDS, Galileo, GLONASS, QZSS, SBAS                                                                                                                                                                                                                                |
| Display          | 3.2 inch, IPS LCD, 240*320 Pixel, Two Point-touch                                                                                                                                                                                                                     |
| Camera           | Front: 0.3MP FF, Support 1D/2D barcode                                                                                                                                                                                                                                |
| Battery          | 3.7V/2000mAh                                                                                                                                                                                                                                                          |
| IC Card Reader   | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                                                                                                                                    |
| NFC              | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                                                                                                                                                 |
| Key/Button       | Power Key                                                                                                                                                                                                                                                             |
| Light Strip      | Three-color Light, Customizable color                                                                                                                                                                                                                                 |
| Audio            | 1W                                                                                                                                                                                                                                                                    |
| Card Type        | Nano SIM*1 + PSAM*1 (Optional: eSIM*1 + SIM*1 + PSAM*1)                                                                                                                                                                                                               |
| Peripheral Ports | Type C*1 (USB2.0, OTG), Pogopin*1(8PIN)                                                                                                                                                                                                                               |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A      Output: 5V DC/2.0A                                                                                                                                                                                                             |
| Physical/Weight  | Φ98.5mm*22.9mm (H)/186.6g                                                                                                                                                                                                                                             |
| Environment      | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing)                                                                                                                      |
| Accessories      | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                                                                                                                                                      |
| Certifications   | PCI, EMV L1/L2, EMV Contactless L1, PayWave, Paypass, Pure, Amex, Discover, qUICS, JCB, AuspayNET, MIR, EFT POS, Felica, Interac, NSICCS, RUPAY, RoHS, TQM, CE, FCC, MIC, JATE, ANRT, CMC,BIS, WPC, NTRA-VOC, WEEE, GSMA, CB, DGM, UN38.3, MSDS, RNIB, IC ID, Verizon |



F360-2 Unattended

|           |                                                                                                                              |
|-----------|------------------------------------------------------------------------------------------------------------------------------|
| Card Type | Nano SIM*1 + PSAM*1                                                                                                          |
| Interface | RS232-A*1(RJ45), RS232-B*1(RJ45), LAN*1(RJ45), PWRDIG.I/O*1, MDB-M EXE*1, MDB-S*1, 4G SMA*1, Type A*1, Type C*1(USB2.0, OTG) |
| Adapter   | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 12V-48V DC/2.0A                                                                 |
| Physical  | 134mm(L)*134mm(W)*60mm(H)                                                                                                    |
| Weight    | 496.5g                                                                                                                       |

F360-3 Multi Dock(Charging+Printer)

|              |                                                                                                                     |
|--------------|---------------------------------------------------------------------------------------------------------------------|
| Interface    | RJ11*1(Cash Drawer), DC Jack*1(Charging), RJ45*1(LAN 100M), Type A*1(USB 2.0 OTG), Type B*1(RS232), Pogopin*1(8PIN) |
| WiFi/BT      | Wi-Fi 4, Bluetooth 5.0/BLE                                                                                          |
| Keys/Buttons | Power Key, Volume+/- Key, Function Key                                                                              |
| Audio        | 4Ω3W                                                                                                                |
| Adapter      | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 12V DC/3.0A                                                            |
| Accessories  | Adapter*1, Manual*1                                                                                                 |

Printer Module

|                    |                                 |
|--------------------|---------------------------------|
| Printing Method    | Thermal dot printing            |
| Number of Dots     | 384 dots/line                   |
| Resolution         | 8 dots/mm(203 dpi)              |
| Paper Size         | 58mm*60mm                       |
| Max Printing Speed | 80 mm/s                         |
| Physical/Weight    | 146mm(L)*125mm(W)*105mm(H)/349g |



F360-4 Customer Display+Printer Dock

|                    |                                                                                                                     |
|--------------------|---------------------------------------------------------------------------------------------------------------------|
| Interface          | RJ11*1(Cash Drawer), DC Jack*1(Charging), RJ45*1(LAN 100M), Type A*1(USB 2.0 OTG), Type B*1(RS232), Pogopin*1(8PIN) |
| WiFi /BT           | Wi-Fi 4, Bluetooth 5.0/BLE                                                                                          |
| Print Size         | 58mm*60mm                                                                                                           |
| Max Printing Speed | 80mm/s                                                                                                              |
| Audio              | 4Ω3W                                                                                                                |
| Customer Display   | 2.4inch, 240*320 IPS                                                                                                |
| Adapter            | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 12V DC/3.0A                                                            |

F360-5 Sound Dock

|           |                                                           |
|-----------|-----------------------------------------------------------|
| Interface | Type C*1                                                  |
| Audio     | 4Ω3W                                                      |
| Adapter   | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 5.0V DC/2.0A |



F360-7 Mini-Unattended

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| Interface  | COIN(4PIN), MAINBOARD(4PIN), Uart(5PIN), FUNCTION(5PIN), SPK(2PIN), Type A*1, Type C*1(USB2.0, OTG) |
| Card Type  | Nano SIM *1+Nano PSAM* 1                                                                            |
| Adapter    | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 5V-24V DC/2.0A                                         |
| Accessorie | Manual*1                                                                                            |
| Physical   | 110mm(L)*110mm(W)*39mm(H)                                                                           |



# F600

Payment  
Android Tablet



F600 FP Fingerprint



F600 FP Fingerprint

## SPECIFICATIONS

|                      |                                                                                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System     | Android 14                                                                                                                                                                            |
| Processor            | Octa-Core up to A73 @2.0GHz                                                                                                                                                           |
| Memory               | 4GB RAM + 64GB ROM                                                                                                                                                                    |
| Communications       | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4&5GHz, Bluetooth 5.1/BLE                                                                                                                                 |
| Location             | GPS, BDS, GLONASS, Galileo, QZSS                                                                                                                                                      |
| Display              | 8 inch, HD IPS LCD, 800*1280 Pixel, Multi-touch                                                                                                                                       |
| Cameras              | Rear: 8MP AF with Flash LED<br>Front: 5MP FF<br>Support 1D/2D barcode                                                                                                                 |
| Battery              | 3.8V/8000mAh                                                                                                                                                                          |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping                                                                                                                       |
| IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                                                    |
| NFC                  | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                                                                 |
| Keys/Buttons         | Power Key, Volume+/- Key, Function Key                                                                                                                                                |
| Card Type            | SIM*2 + PSAM*1<br>(Optional1: SIM*1 + TF Card*1 + PSAM*1/Optional2: eSIM*1 + SIM*1 + TF Card*1 + PSAM*1)                                                                              |
| Peripheral Ports     | Type C*1 (USB2.0, OTG), Pogopin (12pin)*1, Pogopin (6pin)*1                                                                                                                           |
| Adapter              | Input: 100-240V AC, 50/60Hz 0.35A      Output: 5V DC/2.0A                                                                                                                             |
| Physical             | 251mm (L)*136mm (W)*15.8mm (H)                                                                                                                                                        |
| Weight               | 705g                                                                                                                                                                                  |
| Environment          | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing)                                      |
| Accessories          | Adapter*1, USB Cable(only charging)*1                                                                                                                                                 |
| Certifications       | PCI, EMV L1&L2, EMV Contactless L1, Amex, PayWave, Paypass, Discover, JCB, Pure, qUICS, TQM, MIR, DGM, UN38.3, MSDS, NTRA-VOC, CE, ANRT, CB, GSMA, WEEE, Google Smart Tap, FCC, PTCRB |





F360-3 Multi Dock



**F600 Mini Printer ECR:**  
F600 + (F600-6) + (F360-3)



|                    |                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------|
| Interface          | RJ11*1 (Cash Drawer), DC Jack*1 (Charging), RJ45*1 (LAN 100M), Type A*1 (USB 2.0 OTG), Type B*1 (RS232), Pogopin*1 (8PIN) |
| WiFi/BT            | Wi-Fi 4, Bluetooth 5.0/BLE                                                                                                |
| Paper Size         | 58mm*60mm                                                                                                                 |
| Max Printing Speed | 80 mm/s                                                                                                                   |
| Audio              | 4Q3W                                                                                                                      |
| Adapter            | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 12V DC/3.0A                                                                  |

F360-4 Customer Display + Printer Dock



**F600 Mini Printer Display ECR:**  
F600 + (F600-6) + (F360-4)



|                    |                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------|
| Interface          | RJ11*1 (Cash Drawer), DC Jack*1 (Charging), RJ45*1 (LAN 100M), Type A*1 (USB 2.0 OTG), Type B*1 (RS232), Pogopin*1 (8PIN) |
| WiFi/BT            | Wi-Fi 4, Bluetooth 5.0/BLE                                                                                                |
| Paper Size         | 58mm*60mm                                                                                                                 |
| Max Printing Speed | 80 mm/s                                                                                                                   |
| Audio              | 4Q3W                                                                                                                      |
| Customer Display   | 2.4inch, 240*320 IPS                                                                                                      |
| Adapter            | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 12V DC/3.0A                                                                  |

F600-7

F600-7 Smart Multi Dock (NFC)



**F600 Smart Multi ECR:**  
F600 + (F600-7 NFC)



|                  |                                                                                                                |
|------------------|----------------------------------------------------------------------------------------------------------------|
| Interface        | Type A*2 (USB2.0) , RJ11*1 (4pin), RJ12*1 (6pin), RJ45*1 (LAN), Audiojack*1, Type C*1 (host), DC Jack*1 (4pin) |
| Customer Display | 3.5 inch, TFT, 320*480                                                                                         |
| Printer          | Built-in 80mm thermal printer, Paper roll: ϕ 60mm<br>Auto cutter: equipped, Print speed: 200mm/s               |
| Scanner          | Support 1D/2D barcode                                                                                          |
| NFC Reader       | ISO 14443 TypeA and TypeB, ISO 15693                                                                           |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 24V DC/2.5A                                                       |

F600-7 Smart Multi Dock (Palm Print)



**F600 Smart Palm Print Multi ECR:**  
F600 + (F600-7 Palm Print)



|                  |                                                                                                                |
|------------------|----------------------------------------------------------------------------------------------------------------|
| Interface        | Type A*2 (USB2.0) , RJ11*1 (4pin), RJ12*1 (6pin), RJ45*1 (LAN), Audiojack*1, Type C*1 (host), DC Jack*1 (4pin) |
| Customer Display | 3.5 inch, TFT, 320*480                                                                                         |
| Printer          | Built-in 80mm thermal printer, Paper roll: ϕ 60mm<br>Auto cutter: equipped, Print speed: 200mm/s               |
| Scanner          | Support 1D/2D barcode                                                                                          |
| Palmprint        | Support Palmprint recognition                                                                                  |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 24V DC/2.5A                                                       |

F600-8



F310-1 Printer

F600 Handheld Printer:  
F600 + (F600-8) + (F310-1)



|                    |           |
|--------------------|-----------|
| Print Size         | 58mm*40mm |
| Max Printing Speed | 70 mm/s   |

F310-4 Scanner

F600 Handheld Scanner:  
F600 + (F600-8) + (F310-4)



|                  |                                       |
|------------------|---------------------------------------|
| Motion Tolerance | High motion tolerance(6 m/s)          |
| Max Image Speed  | Maximum image capture rate of 120 fps |
| Scan Modes       | Support 1D, 2D barcode and OCR        |

F310-9 Printer+Customer Display

F600 Handheld Printer Display:  
F600 + (F600-8) + (F310-9)



|                    |                           |
|--------------------|---------------------------|
| Customer Display   | LCD 2.4 inch, 240*320 IPS |
| Paper Size         | 58mm*40mm                 |
| Max Printing Speed | 70 mm/s                   |

F310-10 Printer+Capacitive FP

F600 Handheld Printer Capacitive FP:  
F600 + (F600-8) + (F310-10)



|                               |               |
|-------------------------------|---------------|
| 2" Printer (58mm)             |               |
| Paper Size                    | 58mm*40mm     |
| Max Printing Speed            | 70 mm/s       |
| Capacitive Fingerprint Module |               |
| Image Size                    | 256*360 Pixel |
| Image Resolution              | 508 dpi       |

F310-12 Optical FP

F600 Handheld Optical FP:  
F600 + (F600-8) + (F310-12)



|                         |                                      |
|-------------------------|--------------------------------------|
| Image Quality Standards | FBI PIV/Mobile ID FAP10/20 compliant |
| Sensor Type             | Optical                              |
| Resolution              | 500 dpi                              |

F310-12P Identification Printer

F600 Handheld Optical FP Printer:  
F600 + (F600-8) + (F310-12P)



ID Optical Fingerprint Module

|                    |           |
|--------------------|-----------|
| Sensor Type        | Optical   |
| Resolution         | 500 dpi   |
| 2" Printer (58mm)  |           |
| Print Size         | 58mm*40mm |
| Max Printing Speed | 70 mm/s   |

F310-18 Scanner Printer

F600 Handheld Printer Scan:  
F600 + (F600-8) + (F310-18)



Scanner

|                    |                                       |
|--------------------|---------------------------------------|
| Motion Tolerance   | High motion tolerance (6 m/s)         |
| Max Image Speed    | Maximum image capture rate of 120 fps |
| Scan Modes         | Support 1D, 2D barcode and OCR        |
| 2" Printer (58mm)  |                                       |
| Print Size         | 58mm*40mm                             |
| Max Printing Speed | 70 mm/s                               |

F310-20 Handheld Palm Vein Recognition

F600 Handheld Palm Print:  
F600 + (F600-8) + (F310-20)



|                           |                                        |
|---------------------------|----------------------------------------|
| Working Distance          | Within the distance of 5cm~12cm        |
| Resolution/Frame Rate     | RGB/IR: 720*1024/25 FPS                |
| Indoor and Outdoor Scenes | Typical illuminance range 0-50, 000lux |

# M60

Android Tablet



## SPECIFICATIONS

|                  |                                                                                                                                                  |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System | Android 14                                                                                                                                       |
| Processor        | Quad-Core 4*A53@2.0GHz                                                                                                                           |
| Memory           | 4GB RAM + 32GB ROM                                                                                                                               |
| Communications   | 4G + 3G+ 2G,<br>Wi-Fi 6: 2.4&5GHz, Bluetooth 5.4/BLE                                                                                             |
| Location         | GPS, BDS, GLONASS (Select two from three)                                                                                                        |
| Display          | 10.1 inch, HD IPS LCD, 800*1280 Pixel, Multi-touch                                                                                               |
| Cameras          | Rear: 8MP AF with Flash LED<br>Front: 8MP AF<br>Support 1D/2D barcode                                                                            |
| Battery          | 3.8V/8000mAh                                                                                                                                     |
| NFC              | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                            |
| Keys/Buttons     | Power Key, Volume+/- Key                                                                                                                         |
| Audio            | 1W*2                                                                                                                                             |
| Fixed on Bracket | 4 nuts on the back                                                                                                                               |
| Peripheral Ports | Type C*1 (USB2.0, OTG), Back Pogopin*12, Side Pogopin*6                                                                                          |
| Card Type        | SIM*1 + PSAM*1 + TF card*1 (up to 1TB) (Optional: eSIM*1 + PSAM*1 + TF card*1)                                                                   |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A      Output: 5V DC/2.0A                                                                                        |
| Physical/ Weight | 245.8mm (L)*164.6mm (W)*13mm (H)/662g                                                                                                            |
| Environment      | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories      | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                                 |
| Certifications   | CE, ROHS, WEEE, UN38.3, DGM, MSDS                                                                                                                |





F360-3 Multi Dock



**M60 Mini Printer ECR:**  
M60 + (M60-6) + (F360-3)



|                    |                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------|
| Interface          | RJ11*1 (Cash Drawer), DC Jack*1 (Charging), RJ45*1 (LAN 100M), Type A*1 (USB 2.0 OTG), Type B*1 (RS232), Pogopin*1 (8PIN) |
| WiFi/BT            | Wi-Fi 4, Bluetooth 5.0/BLE                                                                                                |
| Paper Size         | 58mm*60mm                                                                                                                 |
| Max Printing Speed | 80 mm/s                                                                                                                   |
| Audio              | 4Ω3W                                                                                                                      |
| Adapter            | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 12V DC/3.0A                                                                  |

F360-4 Customer Display + Printer Dock



**M60 Mini Printer Display ECR:**  
M60 + (M60-6) + (F360-4)



|                    |                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------|
| Interface          | RJ11*1 (Cash Drawer), DC Jack*1 (Charging), RJ45*1 (LAN 100M), Type A*1 (USB 2.0 OTG), Type B*1 (RS232), Pogopin*1 (8PIN) |
| WiFi/BT            | Wi-Fi 4, Bluetooth 5.0/BLE                                                                                                |
| Paper Size         | 58mm*60mm                                                                                                                 |
| Max Printing Speed | 80 mm/s                                                                                                                   |
| Audio              | 4Ω3W                                                                                                                      |
| Customer Display   | 2.4inch, 240*320 IPS                                                                                                      |
| Adapter            | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 12V DC/3.0A                                                                  |

M60-7 Smart Multi Dock (NFC)



**M60 Smart Multi ECR:**  
M60 + (M60-7 NFC)



|                  |                                                                                                                |
|------------------|----------------------------------------------------------------------------------------------------------------|
| Interface        | Type A*2 (USB2.0) , RJ11*1 (4pin), RJ12*1 (6pin), RJ45*1 (LAN), Audiojack*1, Type C*1 (host), DC Jack*1 (4pin) |
| Customer Display | 3.5 inch, TFT, 320*480                                                                                         |
| Printer          | Built-in 80mm thermal printer, Paper roll: φ 60mm<br>Auto cutter: equipped, Print speed: 200mm/s               |
| Scanner          | Support 1D/2D barcode                                                                                          |
| NFC Reader       | ISO 14443 TypeA and TypeB, ISO 15693                                                                           |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 24V DC/2.5A                                                       |

M60-7 Smart Multi Dock (Palm Print)



**M60 Smart Palm Print Multi ECR:**  
M60 + (M60-7 Palm Print)



|                  |                                                                                                                |
|------------------|----------------------------------------------------------------------------------------------------------------|
| Interface        | Type A*2 (USB2.0) , RJ11*1 (4pin), RJ12*1 (6pin), RJ45*1 (LAN), Audiojack*1, Type C*1 (host), DC Jack*1 (4pin) |
| Customer Display | 3.5 inch, TFT, 320*480                                                                                         |
| Printer          | Built-in 80mm thermal printer, Paper roll: φ 60mm<br>Auto cutter: equipped, Print speed: 200mm/s               |
| Scanner          | Support 1D/2D barcode                                                                                          |
| Palmprint        | Support Palmprint recognition                                                                                  |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 24V DC/2.5A                                                       |

M60-8



F310-1 Printer

M60 Handheld Printer:  
M60 + (M60-8) + (F310-1)



|                    |           |
|--------------------|-----------|
| Print Size         | 58mm*40mm |
| Max Printing Speed | 70 mm/s   |

F310-4 Scanner

M60 Handheld Scanner:  
M60 + (M60-8) + (F310-4)



|                  |                                       |
|------------------|---------------------------------------|
| Motion Tolerance | High motion tolerance(6 m/s)          |
| Max Image Speed  | Maximum image capture rate of 120 fps |
| Scan Modes       | Support 1D, 2D barcode and OCR        |

F310-9 Printer+Customer Display

M60 Handheld Printer Display:  
M60 + (M60-8) + (F310-9)



|                    |                           |
|--------------------|---------------------------|
| Customer Display   | LCD 2.4 inch, 240*320 IPS |
| Paper Size         | 58mm*40mm                 |
| Max Printing Speed | 70 mm/s                   |

F310-10 Printer+Capacitive FP

M60 Handheld Printer Capacitive FP:  
M60 + (M60-8) + (F310-10)



|                               |               |
|-------------------------------|---------------|
| 2" Printer (58mm)             |               |
| Paper Size                    | 58mm*40mm     |
| Max Printing Speed            | 70 mm/s       |
| Capacitive Fingerprint Module |               |
| Image Size                    | 256*360 Pixel |
| Image Resolution              | 508 dpi       |

F310-12 Optical FP

M60 Handheld Optical FP:  
M60 + (M60-8) + (F310-12)



|                         |                                      |
|-------------------------|--------------------------------------|
| Image Quality Standards | FBI PIV/Mobile ID FAP10/20 compliant |
| Sensor Type             | Optical                              |
| Resolution              | 500 dpi                              |

F310-12P Identification Printer

M60 Handheld Optical FP Printer:  
M60 + (M60-8) + (F310-12P)



ID Optical Fingerprint Module

|                    |           |
|--------------------|-----------|
| Sensor Type        | Optical   |
| Resolution         | 500 dpi   |
| 2" Printer (58mm)  |           |
| Print Size         | 58mm*40mm |
| Max Printing Speed | 70 mm/s   |

F310-18 Scanner Printer

M60 Handheld Printer Scan:  
M60 + (M60-8) + (F310-18)



Scanner

|                    |                                       |
|--------------------|---------------------------------------|
| Motion Tolerance   | High motion tolerance (6 m/s)         |
| Max Image Speed    | Maximum image capture rate of 120 fps |
| Scan Modes         | Support 1D, 2D barcode and OCR        |
| 2" Printer (58mm)  |                                       |
| Print Size         | 58mm*40mm                             |
| Max Printing Speed | 70 mm/s                               |

F310-20 Handheld Palm Vein Recognition

M60 Handheld Palm Print:  
M60 + (M60-8) + (F310-20)



|                           |                                        |
|---------------------------|----------------------------------------|
| Working Distance          | Within the distance of 5cm~12cm        |
| Resolution/Frame Rate     | RGB/IR: 720*1024/25 FPS                |
| Indoor and Outdoor Scenes | Typical illuminance range 0-50, 000lux |

# M200

Unattended  
Android POS



## SPECIFICATIONS

|                      |                                                                                                                                                   |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System     | Android 11                                                                                                                                        |
| Processor            | Quad-Core 4*A53@2.0GHz                                                                                                                            |
| Memory               | 2GB RAM + 16GB ROM                                                                                                                                |
| Communication        | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4/5GHz, Bluetooth 4.2/BLE                                                                                             |
| Location             | GPS, BDS, GLONASS                                                                                                                                 |
| Display              | 5.0 inch, HD IPS LCD, 720*1280 Pixel, Multi-touch                                                                                                 |
| Camera               | Front: 2MP FF, Support 1D/2D barcode                                                                                                              |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping                                                                                   |
| IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                |
| NFC                  | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                             |
| Card Type            | SIM*2 + PSAM*2                                                                                                                                    |
| Peripheral Ports     | RS232-A*1(RJ45), RS232-B*1(RJ45), LAN*1(RJ45), Type A*1 ,Type C(USB2.0, OTG),<br>4G SMA*1 , MDB-S*1, MDB-M EXE*1, PWRDIG.I/O*1, HDMI*1, TF-card*1 |
| Adapter              | Input: 100-240V AC, 50/60Hz 1.5A      Output: 24.0V DC/2.7A                                                                                       |
| Audio                | 1W                                                                                                                                                |
| Physical             | 146mm (L)*105mm (W)*57mm (H)                                                                                                                      |
| Weight               | 723g                                                                                                                                              |
| Environment          | Operating Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Storage Temperature: -30°C ~ 80°C (-22°F~176°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories          | Adapter*1, USB Cable*1, Manual*1                                                                                                                  |

|                |                                                                                                                                                                                                                                                  |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certifications | PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, qUICS, JCB, EFT POS, AuspayNET, MIR, Pure, TQM, FCC, CE, RoHS, IP65, IK08, ATEX(Exic II 3G Exic IIB T4 Gc), GSMA, WEEE, CB, NTRA-VOC, DGM, UN38.3, MSDS, COMMON-SECC, RNIB |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



# F55 Payment DUO POS



F55 Softpos Version



F55 MPOS Version



F55 Sound Dock

## SPECIFICATIONS

### F55 Duo POS

|                  |                                                                                                                                                                        |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System | Android 14                                                                                                                                                             |
| Processor        | Quad-Core 4*A53@2.0GHz                                                                                                                                                 |
| Memory           | 1GB RAM + 8GB ROM (optional: 2GB + 32GB)                                                                                                                               |
| Communications   | 4G CAT1<br>Wi-Fi 6: 2.4GHz, Bluetooth 5.2                                                                                                                              |
| Location         | GPS, BDS, GLONASS (Select two from three)                                                                                                                              |
| Display          | Main Display: 3.2 inch, 240*320 Pixel, IPS LCD, Two Point-touch<br>Sub Display: 2.0 inch, 32*128 Pixel                                                                 |
| Camera           | Front: 0.3MP FF<br>Support 1D/2D barcode                                                                                                                               |
| Battery          | 3.7V/2600mAh                                                                                                                                                           |
| IC Card Reader   | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                                     |
| NFC              | 13.56MHz, ISO/IEC 14443, ISO18092, Type A&B, Felica, Mifare card, Card emulation                                                                                       |
| Keys/Buttons     | 16 Keys: 0 ~ 9   Enter   Cancel   Clear   Power   Up   Down<br>Touch Button: Menu, Home, Back                                                                          |
| Audio            | 1W                                                                                                                                                                     |
| Card Type        | SIM(Nano)*1 + PSAM(Nano)*1                                                                                                                                             |
| Peripheral Port  | Type C*1 Support OTG                                                                                                                                                   |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 5.0V DC/1.0A                                                                                                              |
| Physical         | 106mm (L)*76.8mm (W)*27.5mm (H)                                                                                                                                        |
| Weight           | 179g                                                                                                                                                                   |
| Certifications   | PCI 7.X, EMV L1&L2, EMV CL L1, Amex, payWave, PayPass, Discover, qUICS, MIR, JCB, AuspayNET, EFT POS, RUPAY, WEEE, ROHS, CB, CE, TQM, NTRA-VOC, GSMA, UN38.8+MSDS, DGM |

|             |                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Environment | Operating Temperature: -10°C ~ 50°C (14°F~122°F), Storage Temperature: -20°C ~ 70°C (-4°F~158°F) , Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                              |

### F55 Softpos Version

|                  |                                                                                  |
|------------------|----------------------------------------------------------------------------------|
| Operating System | Android 14                                                                       |
| Processor        | Quad-Core 4*A53@2.0GHz                                                           |
| Memory           | 2GB RAM + 32GB ROM (optional: 4GB + 32GB)                                        |
| Communications   | 4G CAT1<br>Wi-Fi 6: 2.4GHz, Bluetooth 5.2                                        |
| Location         | GPS, BDS, GLONASS (Select two from three)                                        |
| Display          | 3.2 inch, 240*320 Pixel, IPS LCD, Two Point-touch                                |
| Camera           | Front: 0.3MP FF<br>Support 1D/2D barcode                                         |
| Battery          | 3.7V/2600mAh                                                                     |
| IC Card Reader   | NA                                                                               |
| NFC              | 13.56MHz, ISO/IEC 14443, ISO18092, Type A&B, Felica, Mifare card, Card emulation |
| Keys/Buttons     | Touch Button: Menu, Home, Back                                                   |
| Audio            | 3W                                                                               |
| Card Type        | SIM(Nano)*1 + PSAM(Nano)*1                                                       |
| Peripheral Port  | Type C*1 Support OTG                                                             |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 5.0V DC/1.0A                        |
| Physical         | 106mm (L)*76.8mm (W)*27.5mm (H)                                                  |
| Weight           | 173g                                                                             |
| Certifications   | WEEE, ROHS, CB, CE, TQM, NTRA-VOC, GSMA, UN38.8+MSDS, GMS, DGM                   |

### F55 MPOS Version

|                  |                                                                                                                                                                         |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System | Android 14                                                                                                                                                              |
| Processor        | Quad-Core 4*A53@2.0GHz                                                                                                                                                  |
| Memory           | 1GB RAM + 8GB ROM (optional: 2GB + 32GB)                                                                                                                                |
| Communications   | 4G CAT1<br>Wi-Fi 6: 2.4GHz, Bluetooth 5.2                                                                                                                               |
| Location         | GPS, BDS, GLONASS (Select two from three)                                                                                                                               |
| Display          | 2.0 inch, 32*128 Pixel                                                                                                                                                  |
| Camera           | NA                                                                                                                                                                      |
| Battery          | 3.7V/2600mAh                                                                                                                                                            |
| IC Card Reader   | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                                      |
| NFC              | 13.56MHz, ISO/IEC 14443, ISO18092, Type A&B, Felica, Mifare card, Card emulation                                                                                        |
| Keys/Buttons     | 16 Keys: 0 ~ 9   Enter   Cancel   Clear   Power   Up   Down                                                                                                             |
| Audio            | 1W                                                                                                                                                                      |
| Card Type        | SIM(Nano)*1 + PSAM(Nano)*1                                                                                                                                              |
| Peripheral Port  | Type C*1 Support OTG                                                                                                                                                    |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A<br>Output: 5.0V DC/1.0A                                                                                                               |
| Physical         | 106mm (L)*76.8mm (W)*27.5mm (H)                                                                                                                                         |
| Weight           | 172g                                                                                                                                                                    |
| Certifications   | PCI 7.X, EMV L1&L2, EMV CL L1, Amex, payWave, PayPass, Discover, qUICS, MIR, JCB, AuspayNET, EFT POS, RUPAY, WEEE, ROHS, CB, BIS, CE, TQM, WPC, NTRA, GSMA, UN38.8+MSDS |

# ePayPOS600



## SPECIFICATIONS

|                      |                                                                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System     | RTOS                                                                                                                                           |
| Processor            | 32-bit RISC Core                                                                                                                               |
| Memory               | 128KB RAM + 4MB ROM                                                                                                                            |
| Display              | 1.4 inch, 64*128 Pixel, Mono                                                                                                                   |
| Bluetooth            | BT4.2 (BR/EDR+BLE)                                                                                                                             |
| Battery              | 3.7V/500mAh (optional: 300mAh)                                                                                                                 |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping                                                                                |
| IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                             |
| NFC                  | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                          |
| Keys/Buttons         | 5*3 PIN pad 15 keys                                                                                                                            |
| Audio                | Buzzer                                                                                                                                         |
| Adapter              | Input: 100-240V AC, 50/60Hz 0.35A    Output: 5.0V DC/1.0A                                                                                      |
| Peripheral Port      | Micro USB 2.0                                                                                                                                  |
| Physical             | 113.6mm (L)*59mm (W)*14mm (H)                                                                                                                  |
| Weight               | 80g                                                                                                                                            |
| Environment          | Operating Temperature: 0°C ~ 45°C (32°F~113°F)<br>Storage Temperature: -10°C ~ 60°C (14°F~140°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories          | USB Cable (only charging)*1, Manual*1                                                                                                          |
| Certifications       | PCI, EMV L1&L2, EMV Contactless L1, PayWave, Paypass, Amex, Discover, JCB, Pure, Rupay, MIR, TQM, CE, FCC, BIS, ANRT, WPC, DGM, UN38.3, MSDS   |

# T20

Payment  
Linux POS



## SPECIFICATIONS

|                      |                                                                                                                                                  |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System     | Linux                                                                                                                                            |
| Processor            | Dual-Core 2*A53@1.3GHz                                                                                                                           |
| Memory               | 256MB RAM + 512MB ROM                                                                                                                            |
| Communications       | 4G + 3G + 2G,<br>Wi-Fi 4: 2.4GHz, Bluetooth 4.2/BLE                                                                                              |
| Location             | GPS, GLONASS                                                                                                                                     |
| Display              | 3.5 inch, TFT, 240*320 Pixel                                                                                                                     |
| Camera               | Rear: 0.3MP FF, Support 1D/2D barcode                                                                                                            |
| Printer              | High-speed thermal printer, Paper size: 58mm*40mm                                                                                                |
| Battery              | 3.7V/5200mAh                                                                                                                                     |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping                                                                                  |
| IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                               |
| NFC                  | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                            |
| Keys/Buttons         | 19Keys: 0~9   Up   Down   Power on/off   F1   F2   F3   Cancel   Enter   Clear                                                                   |
| Peripheral Port      | Type C*1 (USB2.0, OTG)                                                                                                                           |
| Adapter              | Input: 100-240V AC, 50/60Hz 0.35A      Output: 5V DC/2.0A                                                                                        |
| Physical             | 198.2mm (L)*80.7mm (W)*53.6mm (H)                                                                                                                |
| Weight               | 410g                                                                                                                                             |
| Environment          | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories          | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                                 |
| Certifications       | PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, Pure, qUICS, CE, TQM, DGM, UN38.3, MSDS, GSMA, WEEE, NTRA-VOC              |

# T50 Payment Android Pinpad



## SPECIFICATIONS

|                      |                                                                                                                                                   |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System     | Android 14                                                                                                                                        |
| Processor            | Quad-Core 4*A53@2.0GHz                                                                                                                            |
| Memory               | 1GB RAM + 8GB ROM                                                                                                                                 |
| BT + WIFI            | Bluetooth 5.2/BLE, Wi-Fi 6: 2.4Ghz                                                                                                                |
| Display              | 2.4 inch, TFT, 240*320 Pixel                                                                                                                      |
| Camera               | 0.3MP FF, Support 1D/2D barcode                                                                                                                   |
| Magnetic Card Reader | ISO/IEC 7811, ISO/IEC 7813, Track 1/2/3, Bi-directional swiping                                                                                   |
| IC Card Reader       | ISO/IEC 7816, Conform to EMV L1/L2                                                                                                                |
| NFC                  | 13.56MHz, ISO/IEC 14443, Type A&B                                                                                                                 |
| Keys/Buttons         | 16 Keys: 0 ~ 9   Enter   Clear   Cancel   Function   Up   Down                                                                                    |
| Audio                | 1W                                                                                                                                                |
| Card Type            | PSAM*1 + TF Card*1                                                                                                                                |
| Peripheral Ports     | Type A*2 (optional: Type A*1 + RJ11*1)                                                                                                            |
| Adapter              | Input: 100-240V AC, 50/60Hz 0.35A    Output: 5V DC/2.0A                                                                                           |
| Physical             | 151.4mm (L)*80.5mm (W)*56.1mm (H)                                                                                                                 |
| Weight               | 235g                                                                                                                                              |
| Environment          | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing)  |
| Accessories          | Adapter*1, Manual*1                                                                                                                               |
| Certifications       | PCI, EMV L1&L2, EMV Contactless L1, Paypass, PayWave, Amex, Discover, Pure, MIR, qUICS, EFT POS, TQM, CE, NTRA-VOC, ANRT, WEEE, DGM, UN38.3, MSDS |



# F100 Non-Payment Android POS

Google Mobile Services 



F100 FP Fingerprint



F100 Fiscal

## SPECIFICATIONS

|                  |                                                                                                                                                  |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System | Android 11                                                                                                                                       |
| Processor        | Quad-Core 4*A53@2.0GHz                                                                                                                           |
| Memory           | 2GB RAM + 16GB ROM                                                                                                                               |
| Communications   | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4&5GHz, Bluetooth 5.0/BLE                                                                                            |
| Location         | GPS/A-GPS, GLONASS, BDS, Galileo                                                                                                                 |
| Display          | 5.0 inch, HD IPS LCD, 720*1280 Pixel, Multi-touch                                                                                                |
| Camera           | Rear: 8MP AF with Flash LED, Support 1D/2D barcode                                                                                               |
| Printer          | Thermal printer, Paper size: 58mm*40mm                                                                                                           |
| Battery          | 3.8V/4000mAh                                                                                                                                     |
| Keys/Buttons     | Power Key, Volume+/-Key                                                                                                                          |
| NFC              | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                            |
| Card Type        | SIM*2 + TF Card*1                                                                                                                                |
| Peripheral Ports | Type C*1 (USB2.0, OTG ), 3.5mm Audio Jack*1                                                                                                      |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A      Output: 5V DC/2.0A                                                                                        |
| Audio            | 1W                                                                                                                                               |
| Physical         | 197mm (L)*77mm (W)*52.6mm (H)                                                                                                                    |
| Weight           | 323g                                                                                                                                             |
| Environment      | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories      | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                                 |
| Certifications   | CE, ANRT, EAC, FAC, CB, BIS, WPC, DGM, UN38.3, MSDS, GSMA, JATE, TELEC, Google GMS SafetyNet Compliance                                          |

# V11 Identification Terminal



## SPECIFICATIONS

|                  |                                                                                                                                               |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System | Android 11                                                                                                                                    |
| Processor        | Quad-Core 4*A43@2.0GHz                                                                                                                        |
| Memory           | 3GB RAM + 32GB ROM                                                                                                                            |
| Communications   | 4G + 3G + 2G,<br>Wi-Fi 5: 2.4&5GHz, Bluetooth 4.2/BLE                                                                                         |
| Location         | GPS/A-GPS, BDS, GLONASS                                                                                                                       |
| Display          | 5.0 inch, HD IPS LCD 720*1280 Pixel, Multi-touch                                                                                              |
| Cameras          | Rear: 8MP AF with Flash LED<br>Front: 5MP FF<br>Support 1D/2D barcode                                                                         |
| GMS              | Support Google mobile services                                                                                                                |
| Battery          | 3.8V/5000mAh                                                                                                                                  |
| SoftPOS          | Support FT PAY (Feitian softPOS)                                                                                                              |
| IC Card Reader   | ISO/IEC 7816                                                                                                                                  |
| NFC              | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                         |
| Card Type        | Micro SIM*1 + PSAM*2 + TF card(up to 128GB)                                                                                                   |
| Peripheral Port  | Type C*1(USB2.0, OTG)                                                                                                                         |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A      Output: 5V DC/2.0A                                                                                     |
| Physical         | 204.5mm (L)*80.6mm (W)*24.6mm (H)                                                                                                             |
| Weight           | 327g                                                                                                                                          |
| Environment      | Operating Temperature: 0°C ~ 60°C (0°F~140°F)<br>Storage Temperature: -20°C ~ 85°C (-4°F~185°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories      | Adapter*1, USB Cable*1, Hand strap*1                                                                                                          |

|                |            |
|----------------|------------|
| Certifications | CE, UN38.3 |
|----------------|------------|

# F310A

Non-Payment  
Android POS

Google Mobile Services 



NFC Only



IC CARD+NFC



Top Scanner Optional

Shared Accessories with F310 P F310-1/3/4/5/6/9/10/12/12P/18/20

## SPECIFICATIONS

|                  |                                                                                                                                                  |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System | Android 14                                                                                                                                       |
| Processor        | Quad-Core 4*A53@2.0GHz                                                                                                                           |
| Memory           | 2GB RAM + 32GB ROM                                                                                                                               |
| Communications   | 4G + 2G<br>Wi-Fi 6: 2.4&5GHz, Bluetooth 5.4/BLE                                                                                                  |
| Location         | GPS, BDS, GLONASS (Select two from three)                                                                                                        |
| Display          | 6.5 inch, HD IPS LCD, 720*1600 Pixel, Multi-touch                                                                                                |
| Cameras          | Rear: 8MP AF with Flash LED<br>Front: 2MP FF<br>Support 1D/2D barcode                                                                            |
| Battery          | 3.8V/3000mAh                                                                                                                                     |
| NFC              | 13.56MHz, ISO/IEC 14443, ISO/IEC 18092, Type A&B, Felica, Mifare card                                                                            |
| Keys/Buttons     | Power Key, Function Key, Volume+/- Key                                                                                                           |
| Audio            | 1W                                                                                                                                               |
| Peripheral Ports | Type C*1 (USB2.0, OTG), Pogopin (6PIN)*1, Pogopin (8PIN)*1                                                                                       |
| Card Type        | SIM*1 + PSAM*1 + TF card*1 (up to 1TB) (Optional: eSIM*1 + PSAM*1 + TF card*1)                                                                   |
| Adapter          | Input: 100-240V AC, 50/60Hz 0.35A      Output: 5V DC/2.0A                                                                                        |
| Physical/ Weight | 173mm (L)*82.5mm (W)*17.2mm (H)/278g                                                                                                             |
| Environment      | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories      | Adapter*1, USB Cable (only charging)*1, Manual*1                                                                                                 |
| Certifications   | CE, FCC, NTRA-VOC, WEEE, GSMA, RoHS, UN38.3, MSDS, GMS (certification model: F310 P)                                                             |

# M500

## Android ECR Cash Register



## SPECIFICATIONS

|                  |                                                                                                                                                  |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating System | Android 11                                                                                                                                       |
| Processor        | Quad-Core 4*A55@2.0GHz                                                                                                                           |
| Memory           | 4GB RAM + 64GB ROM                                                                                                                               |
| Ethernet         | LAN 100M                                                                                                                                         |
| Bluetooth        | BT4.2 (BR/EDR+BLE)                                                                                                                               |
| WIFI             | 2.4GHz/5GHz, 802.11 b/g/n/ac                                                                                                                     |
| Display          | 15.6" (1080*1920) + 15.6" (1080*1920) CTP/Multi-touch                                                                                            |
| Printer          | Paper size: 80mm*80mm<br>Print speed: Up to 200mm/s                                                                                              |
| Peripheral Ports | Type A*5, RJ11*1, RJ12*1, DC*1, RJ45*1, 3.5mm Audio Jack*1                                                                                       |
| Key/Button       | Power Key                                                                                                                                        |
| Audio            | 3W                                                                                                                                               |
| Adapter          | Input: 100-240V AC, 50/60Hz 2.0A    Output: 24.0V DC/2.75A                                                                                       |
| Card Type        | TF Card*1                                                                                                                                        |
| Environment      | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 70°C (-4°F~158°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Physical         | 382mm (L)*190mm (W)*400mm (H)                                                                                                                    |
| Accessories      | Adapter*1, Manual*1                                                                                                                              |
| Certifications   | CE, RoHS, WEEE, NTRA-VOC, ANRT                                                                                                                   |

M500 Options



15.6"+15.6"

M500LA: 2G+16G  
M500HA: 4G+64G



15.6"+10.1"

M500LB: 2G+16G  
M500HB: 4G+64G



15.6"+F600  
F600FP(Optional)

M500LP: 2G+16G  
M500HP: 4G+64G



15.6"

M500L: 2G+16G  
M500H: 4G+64G

M500 with PIN PAD T50





# M8

Static QR Sound Box



## SPECIFICATIONS

|                 |                                                                                                                                                        |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Processor       | ARM V8-M RTOS, 500Mhz                                                                                                                                  |
| Memory          | 4MB RAM + 4MB ROM                                                                                                                                      |
| Communications  | 4G                                                                                                                                                     |
| Audio           | 4Ω/3W                                                                                                                                                  |
| Keys/Buttons    | Power Key, Volume+/- Key, Function Key, Reset                                                                                                          |
| Peripheral Port | Micro USB                                                                                                                                              |
| Indicator       | Red, green, and blue indicator                                                                                                                         |
| Battery         | 3.7V/1200mAh                                                                                                                                           |
| Card Type       | SIM*1                                                                                                                                                  |
| Power           | Support 5V-1A power adapter input                                                                                                                      |
| Physical        | 80mm (L)*28mm (W)*66mm (H)<br>With QR Code Bracket: 90mm (L)*60.62mm (W)*80.3mm (H)                                                                    |
| Weight          | 123g                                                                                                                                                   |
| Environment     | Operating Temperature: 0°C ~ 60°C (32°F~144°F)<br>Storage Temperature: -20°C ~ 60°C (-4°F~140°F)<br>Storage Relative Humidity: 5%-96% (Non-Condensing) |
| Certifications  | BIS                                                                                                                                                    |

# M10

Static QR Sound Box



Display(optional)  
Six-digit Segment Display Screen

## SPECIFICATIONS

|                 |                                                                                                                                                  |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Processor       | Cortex-R5 RTOS                                                                                                                                   |
| Memory          | 4MB RAM + 4MB ROM                                                                                                                                |
| Communications  | 4G (optional: Wi-Fi 4: 2.4GHz)                                                                                                                   |
| Audio           | 4Ω/3W                                                                                                                                            |
| Keys/Buttons    | Power Key, Volume+/- Key, Function Key, Reset                                                                                                    |
| Peripheral Port | Type C*1                                                                                                                                         |
| Indicator       | Red, green, and blue indicator                                                                                                                   |
| Battery         | 3.7V/2000mAh                                                                                                                                     |
| Card Type       | SIM*1                                                                                                                                            |
| Power           | Support 5V-1A power adapter input                                                                                                                |
| Physical        | 132mm (L)*65mm (W)*73mm (H)<br>With QR Code Bracket: 132mm(L)*65mm(W)*181mm(H)                                                                   |
| Weight          | 223g                                                                                                                                             |
| Environment     | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 60°C (-4°F~140°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |

# M20

Dynamic QR Sound Box



## SPECIFICATIONS

|                 |                                                                                                                                                                     |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Processor       | Cortex-R5 RTOS                                                                                                                                                      |
| Memory          | 8MB RAM + 8MB ROM                                                                                                                                                   |
| Communications  | 4G (optional: Wi-Fi 4: 2.4GHz)                                                                                                                                      |
| Display         | 2.4 inch, TFT, 240*320 Pixel                                                                                                                                        |
| Audio           | 4Ω/3W                                                                                                                                                               |
| Keys/Buttons    | Power Key, Volume+/- Key, Function Key, Reset                                                                                                                       |
| Peripheral Port | Type C*1                                                                                                                                                            |
| Indicator       | Red, green and blue indicator                                                                                                                                       |
| Battery         | 3.7V/2000mAh                                                                                                                                                        |
| Card Type       | SIM*1                                                                                                                                                               |
| Keyboard        | Buttons: with 0-9/00 number keys, function key, cancel key, enter key, etc<br>Display: Segment code display, can display the amount of payment, network status, etc |
| Power           | Support 5V-1A power adapter input                                                                                                                                   |
| Physical        | 90mm (L)*90mm (W)*116mm (H)                                                                                                                                         |
| Weight          | 210g                                                                                                                                                                |
| Environment     | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 60°C (-4°F~140°F)<br>Relative Humidity: 5%-96% (Non-Condensing)                    |

M80 IoT PayBOX  
CPM(Consumer Presented Mode)




|                           |                                                                                                                                                  |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| System                    | Linux                                                                                                                                            |
| Processor                 | ARM Cortex-A7 Dual core CPU                                                                                                                      |
| Memory                    | 64MB RAM + 128MB ROM                                                                                                                             |
| Communications            | Wi-Fi 6: 2.4&5GHz                                                                                                                                |
| Display                   | 2.8 inch IPS, Touch Screen                                                                                                                       |
| Scan                      | High motion tolerance<br>Support mainstream one-dimensional and two-dimensional code systems                                                     |
| Protocol                  | MQTT                                                                                                                                             |
| Supporting Peripherals    | Coin dispensers, Game consoles, Gift devices, Scanning devices                                                                                   |
| LED                       | Colorful high brightness indicator light                                                                                                         |
| Audio                     | 1.5W                                                                                                                                             |
| Other physical interfaces | 12pin (Power input, pulse input/output, debug serial port)                                                                                       |
| Power                     | 5.0-24.0V DC/2.0A                                                                                                                                |
| Physical/Weight           | 72mm (L)*82.5mm (W)*18mm (H)/83g                                                                                                                 |
| Environment               | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 60°C (-4°F~140°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Accessories               | Wiring box, Installation bracket                                                                                                                 |
| Certifications            | TELEC                                                                                                                                            |

F76 IoT PayBOX  
MPM(Merchant Presented Mode)



|                        |                                                                                                                                                  |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| System                 | RTOS                                                                                                                                             |
| Processor              | 32-bit processor, 240MHz                                                                                                                         |
| Memory                 | 320KB RAM + 4MB ROM                                                                                                                              |
| Communications         | WiFi 2.4GHz                                                                                                                                      |
| Protocol               | MQTT                                                                                                                                             |
| Peripheral Ports       | Pulse I/O*3, UART*2                                                                                                                              |
| Supporting Peripherals | Coin dispensers, Game consoles, Gift devices, Scanning devices                                                                                   |
| LED                    | Red, green and blue indicator                                                                                                                    |
| Power                  | 9.0-24.0V DC/1.0A                                                                                                                                |
| Physical/Weight        | 71.5mm (L)*66mm (W)*17mm (H)/62g (Without antenna)                                                                                               |
| Environment            | Operating Temperature: -10°C ~ 50°C (14°F~122°F)<br>Storage Temperature: -20°C ~ 60°C (-4°F~140°F)<br>Relative Humidity: 5%-96% (Non-Condensing) |
| Certifications         | TELEC                                                                                                                                            |

PayBOX IoT Cloud Platform

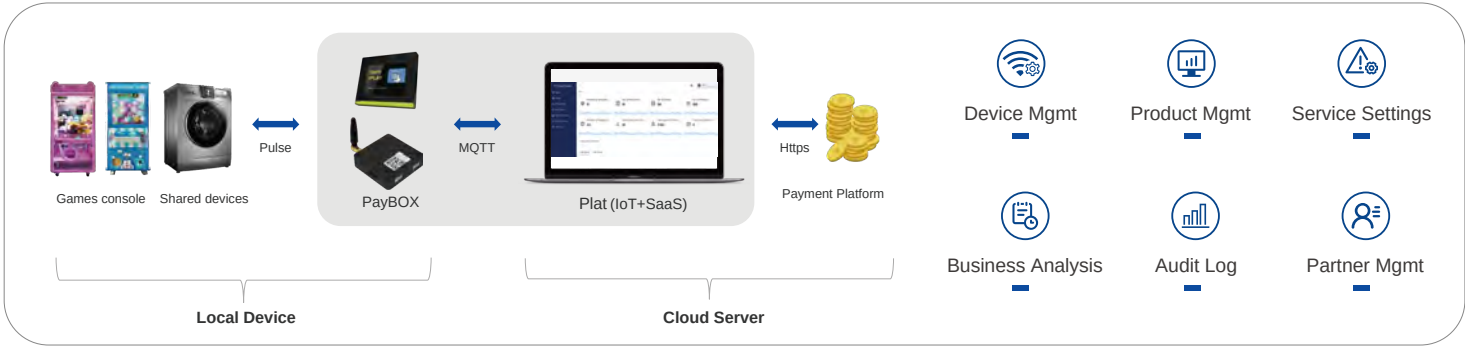



# Charging Cradle

## F20 Charging Cradle



### Multi Dock

|               |                                               |
|---------------|-----------------------------------------------|
| Ports         | Type C*1, RJ45*1, RJ11*1, Type A*2, Scanner*1 |
| Pogo Pin      | 8 pin                                         |
| Certification | CE, RoHS                                      |



### Charging Cradle

|               |                  |
|---------------|------------------|
| Input         | USB Type C 5V/2A |
| Pogo Pin      | 2 pin            |
| Certification | CE, RoHS         |



### Multi Dock Lite

|               |                                    |
|---------------|------------------------------------|
| Ports         | Type C*1, RJ45*1, RJ11*1, Type A*2 |
| Pogo Pin      | 8 pin                              |
| Certification | CE, RoHS                           |



### Multi-function Battery Cover

|               |                  |
|---------------|------------------|
| Ports         | Type C*1, RJ45*1 |
| Pogo Pin      | 8 pin            |
| Certification | CE, RoHS         |

## F100 Charging Cradle



### Charging Cradle

|               |                  |
|---------------|------------------|
| Input         | USB Type C 5V/2A |
| Pogo Pin      | 2 pin            |
| Certification | CE, RoHS         |

## F210 Charging Cradle



### Multi-function Dock Lite

|               |                                        |
|---------------|----------------------------------------|
| Ports         | Type C*1, RJ11*1, RJ45*1, USB Type A*2 |
| Pogo Pin      | 6 pin                                  |
| Certification | CE, RoHS                               |

# Silicone Covers (Customized colors)

|                                                                                                                                                       |                                                                                                                                                       |                                                                                                                         |                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><b>F20</b></div> <div></div>                                    | <div><b>F100</b></div> <div></div>                                   | <div><b>F210</b></div> <div></div>   |                                                                                                                                                               |
| <div><b>F310 P</b></div> <div></div> <div>Button Silicon Cover</div> | <div><b>F310 P/F310A</b></div> <div></div> <div>Silicon Cover</div> |                                                                                                                         | <div><b>F310 P/F310A</b></div> <div></div> <div>Printer Silicon Cover</div> |
| <div><b>F300</b></div> <div></div>                                 | <div><b>F360</b></div> <div></div>                                 | <div><b>F600</b></div> <div></div> |                                                                                                                                                               |

# Screen Protector (Hydrogel film)

|                                                                                                      |                                                                                                        |                                                                                                     |                                                                                                     |
|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>F20</b><br>    | <b>F100</b><br>     | <b>F210</b><br>  | <b>F600</b><br>  |
| <b>F300</b><br> | <b>F310 P</b><br> | <b>T20</b><br> | <b>T50</b><br> |

Printer

P10



|                     |                          |
|---------------------|--------------------------|
| Printing Technology | Thermal printing         |
| Paper Width         | 58mm*50mm                |
| Print Speed         | 60-90 mm/s               |
| Print Life          | 50KM                     |
| Interface           | USB+ Bluetooth           |
| Power Adapter       | Type-C, DC 5V/1A         |
| Lithium Battery     | 1800mAh/7.4V             |
| Operating System    | Android, IOS, Windows    |
| Dimensions          | 112mm(L)*81mm(W)*56mm(H) |
| Certification       | CE                       |

P50



|                     |                                                                                                       |
|---------------------|-------------------------------------------------------------------------------------------------------|
| Printing Technology | Thermal printing                                                                                      |
| Paper Width         | 48mm~80mm±0.5mm                                                                                       |
| Print Speed         | 300 mm/s                                                                                              |
| Print Life          | 150KM                                                                                                 |
| Interface           | USB+RS232+RJ45+RJ11<br>USB+BT+RJ11(Optional)<br>USB+WiFi+RJ11(Optional)<br>USB+WiFi+BT+RJ11(Optional) |
| Cutters             | Automatic Cutter                                                                                      |
| Power Adapter       | DC 24V/2.5A                                                                                           |
| Operating System    | Android, IOS, Windows                                                                                 |
| Dimensions          | 140mm(L)*178mm(W)*130mm(H)                                                                            |
| Certification       | CE                                                                                                    |

P60



|                     |                            |
|---------------------|----------------------------|
| Printing Technology | Thermal printing           |
| Paper Width         | 58mm*60mm                  |
| Print Speed         | 80 mm/s                    |
| Print Life          | 150KM                      |
| Interface           | WiFi+BT+RJ45               |
| Cutters             | Manual Cutter              |
| Power Adapter       | DC12V/3A                   |
| Operating System    | Android, IOS, Windows      |
| Dimensions          | 146mm(L)*125mm(W)*105mm(H) |
| Certification       | CE                         |

Barcode Scanner/Cash Box/Bracket

F26



|                   |                                 |
|-------------------|---------------------------------|
| Scan Modes        | Trigger /Auto-sense /Continuous |
| Scanning Accuracy | ≥4 mil/0.1mm (PCS90%, CODE39)   |
| Size(L*W*H)       | Scanner 165mm*60mm*84mm         |
| Certification     | CE, FCC, ROHS                   |

F20 (Applicable to F210/F100 /T20/F310 P/T50)



F68



|                   |                                |
|-------------------|--------------------------------|
| Scan Modes        | Manual /Auto-sense             |
| Scanning Accuracy | ≥5 mil/0.127m (PCS90%, CODE39) |
| Size(L*W*H)       | Scanner 150mm*70mm* 95mm       |
| Certification     | CE, FCC, ROHS                  |

F600 Desktop Rotating



FTA-200



|               |                     |
|---------------|---------------------|
| Size(W*L*H)   | 335*368*80mm        |
| Bill Width    | 78/73/73/70mm       |
| Coin Width    | Coin Width 61/165mm |
| Certification | CE, ROHS            |

F600 Wall-mounted Rotating




# FT SmartPay



**FT SMARTPAY**

Android Merchant/Cashier Application

A standard, flexible, stable Android payment application (APK format), with a complete bank card transaction capacity, mobile payment capacity and value-added features.

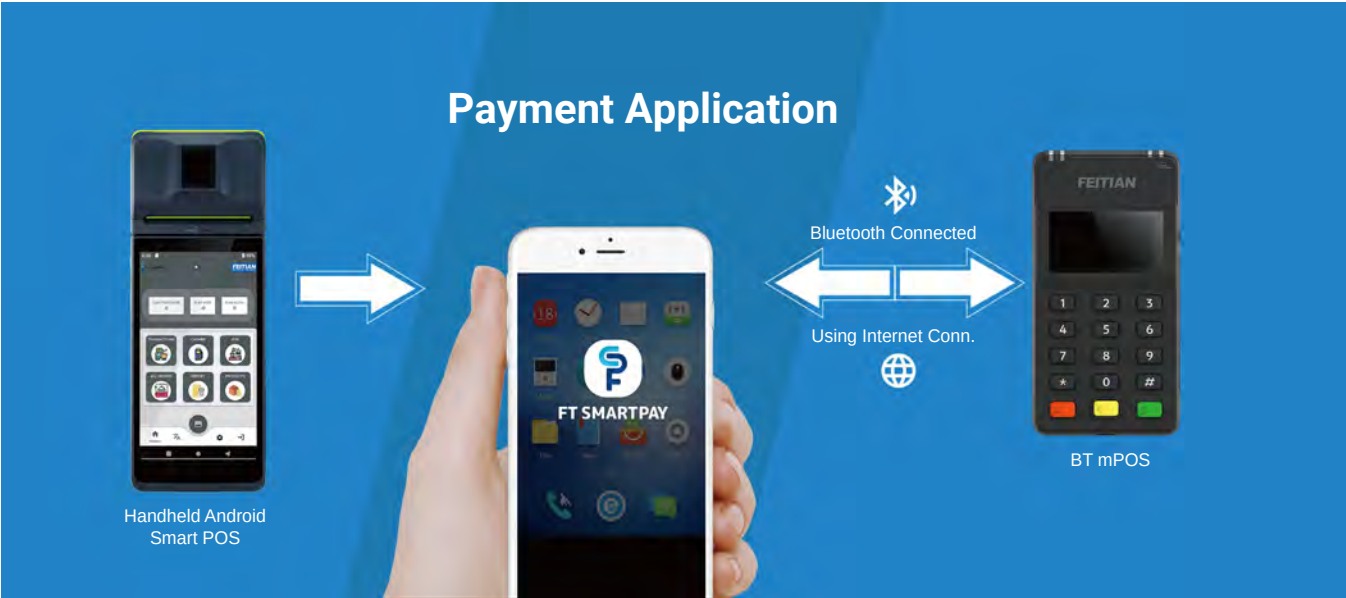

|                                                                                                   |                                                                                                                     |                                                                                                                           |                                                                                                                        |                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EMV</b><br>UPI<br>Visa<br>MasterCard<br>AMEX<br>JCB<br>Discover<br>MIR/RuPay/PURE/NSIC<br>CS   | <b>Key Methods</b><br>MK/SK<br>DUKPT                                                                                | <b>Key Loading Device</b><br>Manual Input<br>From IC Card<br>Download From STORM<br>Download From Bank<br>Acquirer System | <b>Card Operation Type</b><br>Contact ICC<br>Contactless ICC<br>Magnetic Stripe Cards                                  | <b>Parameters Config</b><br>Local Config<br>Import FromSDCard<br>Download From STORM<br>Download From Bank<br>Acquirer System                               |
| <b>Store Manager</b><br>Inventory<br>Staff<br>Supplier<br>Purchase<br>Expense<br>Loyalty /Rewards | <b>Code/Mobile Payments</b><br>POS Scan Customer<br>Customer Scan POS<br>Inquiry<br>Refund<br>Cancel<br>Coupon Scan | <b>Printer Support</b><br>Local Printer<br>BT Printer<br>IP Printer(ESC/POS)                                              | <b>Payment Types</b><br>Cash/Card/Mobile<br>Payments<br>Alipay<br>Instalments<br>Tips<br>Offline Sales<br>ECR Payments | <b>Others</b><br>Topup/Evouchers<br>Bill Payments<br>ON US Cards<br>Multi Language<br>mPOS and POS Support<br>Android Smart Phone<br>Support<br>ECR Support |

**Business Management in One APP**

- Customer loyalty Program
- Purchase
- Inventory
- Report
- Supplier Management
- Pre-Auth
- Expense
- User Management
- Order History
- Card Balance
- Reconciliation

**Omnichannel Payment in One APP**

Cash

Bank Card

QR Code

3rd Party Wallet

## FT SmartPay Compatibility for L3 Payment Certification

Supported Protocols: Nexio/ISO8583/Hypercom/TLV Messaging/MQTT



## FT SmartPay Mobile Payment Compatibility







# FTPAY

Turn Your Smartphone into a Smart Payment Terminal

The innovative SoftPOS solution that empowers you to take payments on-the-go. With FTPAY, you can easily turn your smartphone or tablet into a powerful payment terminal, accepting payments securely and efficiently.

## Key Features



### 02. Mobility and Flexibility

Transform any NFC-enabled smartphone or tablet into a fully functional POS system, empowering businesses to accept payments anytime, anywhere.



### 01. Secure and Contactless Payments


Our SoftPOS application enables businesses to accept payments securely and conveniently through contactless technology, enhancing customer safety and reducing transaction time.




### 03. Seamless Integration


With seamless integration capabilities, the FTPAY SoftPOS application effortlessly syncs with existing payment infrastructure and systems, streamlining operations for businesses of all sizes.

## FTPAY Architecture

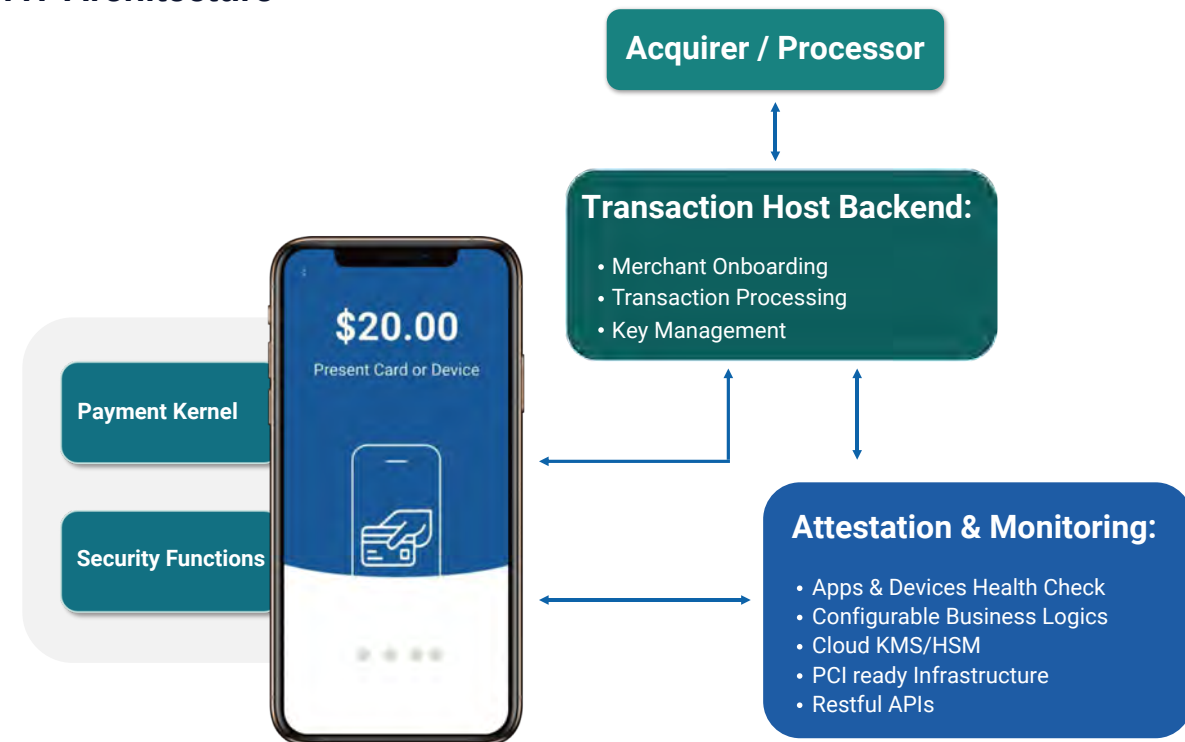

## FTPAY Security

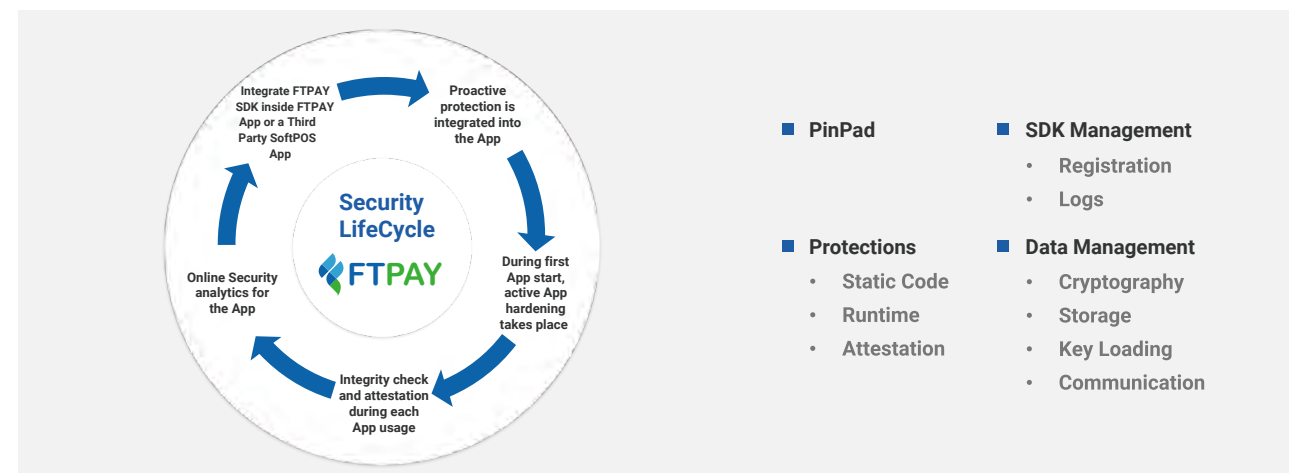




## FT STORM

Smart Terminal Operations Remote Manager


The next generation TMS platform realizes the management of traditional POS, Android Smart Phones, Android POS and Mobile POS via one platform.



### STORM-TMS

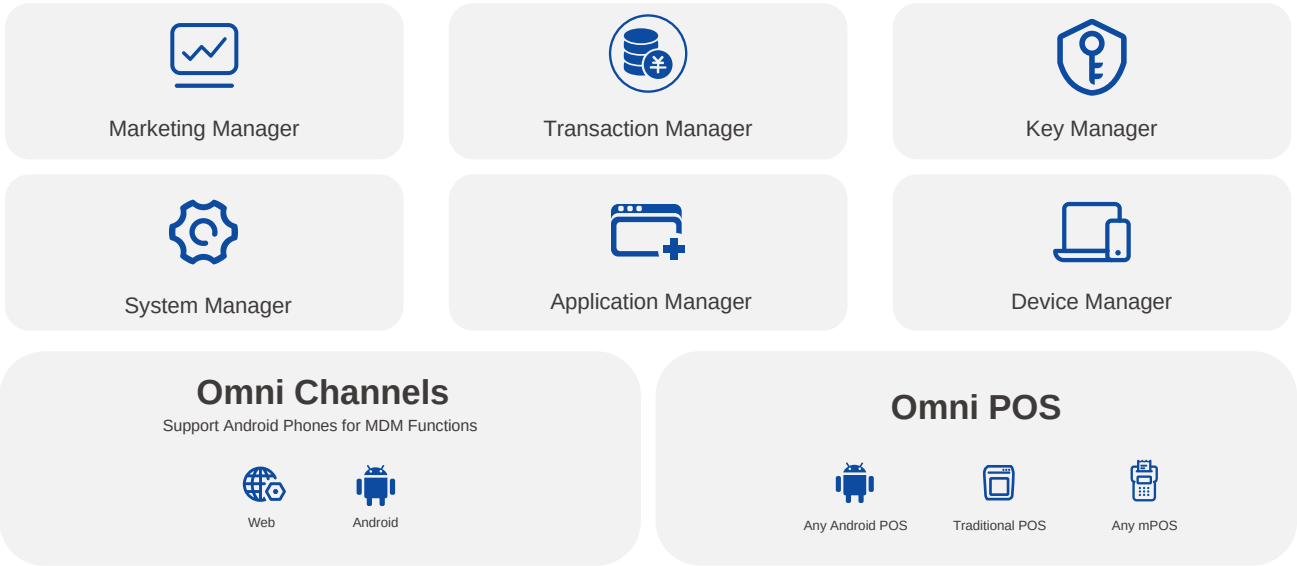

### STORM-TMS Security Compliance

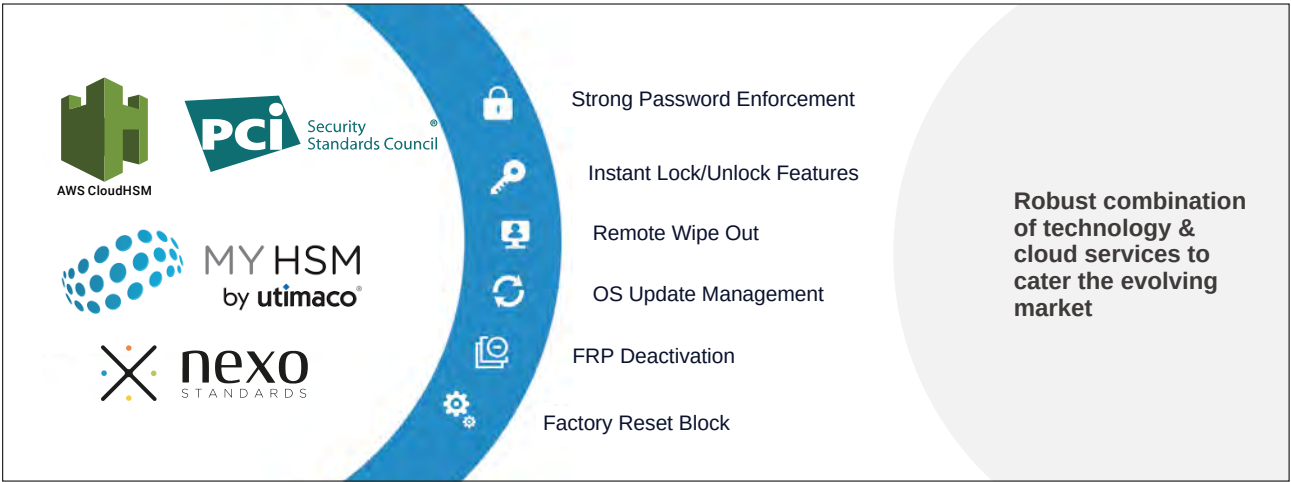

# FT Cloud Cashier



## FT CLOUD CASHIER


Revolutionize Retail with Cloud-Powered Cash Register Solutions

FT Cloud Cashier streamlines in-store transactions and integrates seamlessly with Feitian's POS and SmartPay solutions to enhance operational efficiency, security, and customer experience.


### FT Cloud Cashier in Retail Scenarios



Seamlessly integrates with your existing setup,  
whether **Android, Windows, or Feitian POS** devices

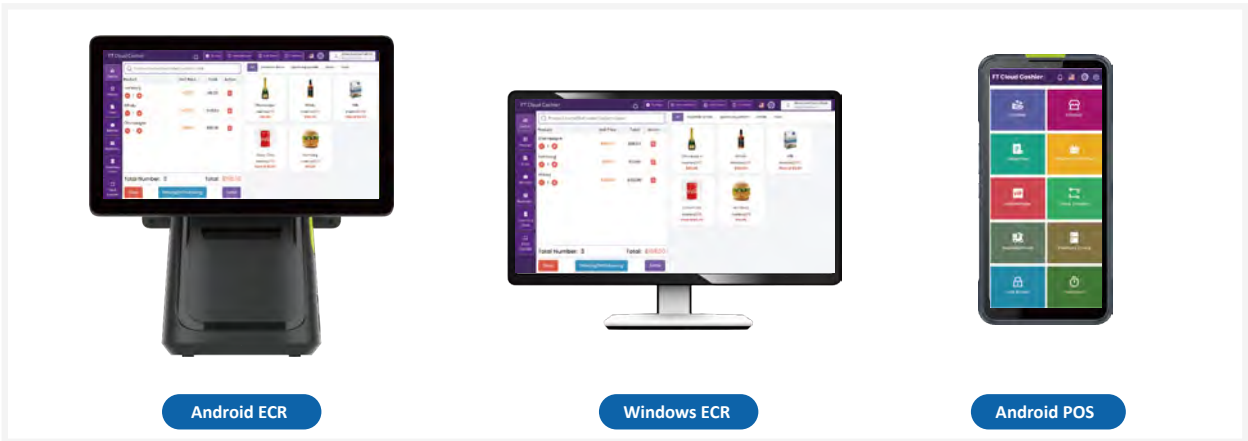


### Accelerate sales with an intuitive, 3-step checkout process

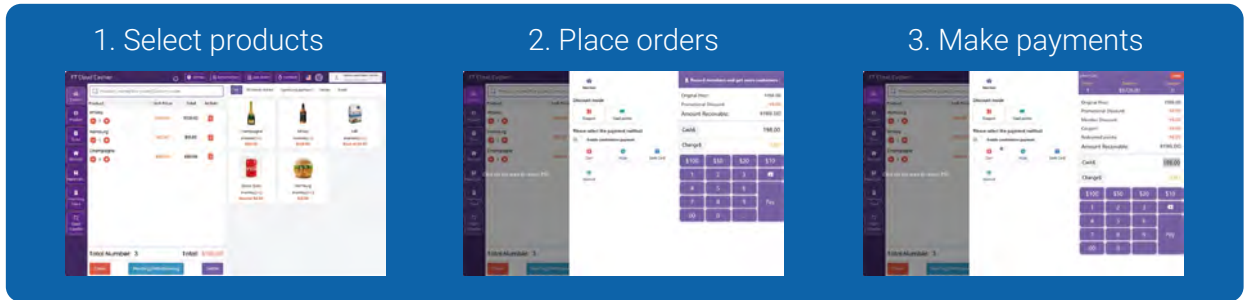

### Merchant Management Platform

Manage your business from any device, anytime, anywhere

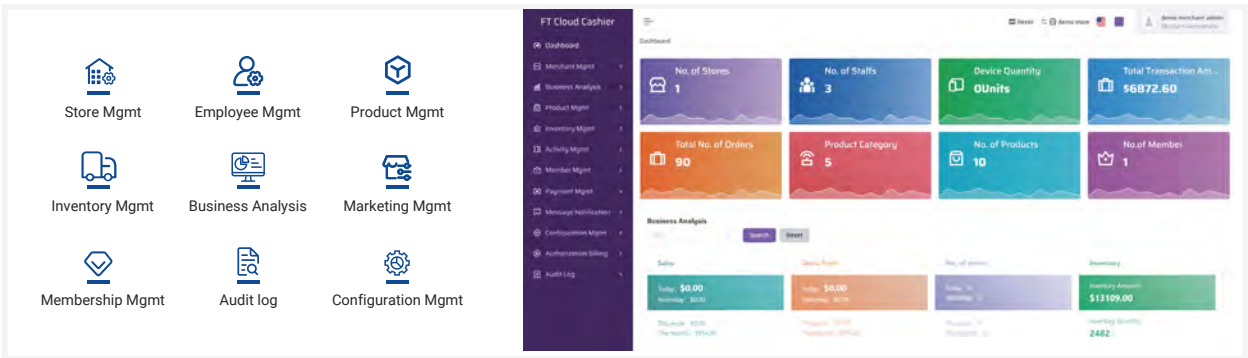





FT STORE

Empowering Developers and Merchants at Every Point of Sales

FT Store connects developers and merchants, offering a dynamic platform to create, sell, and deploy applications seamlessly on Feitian's devices.

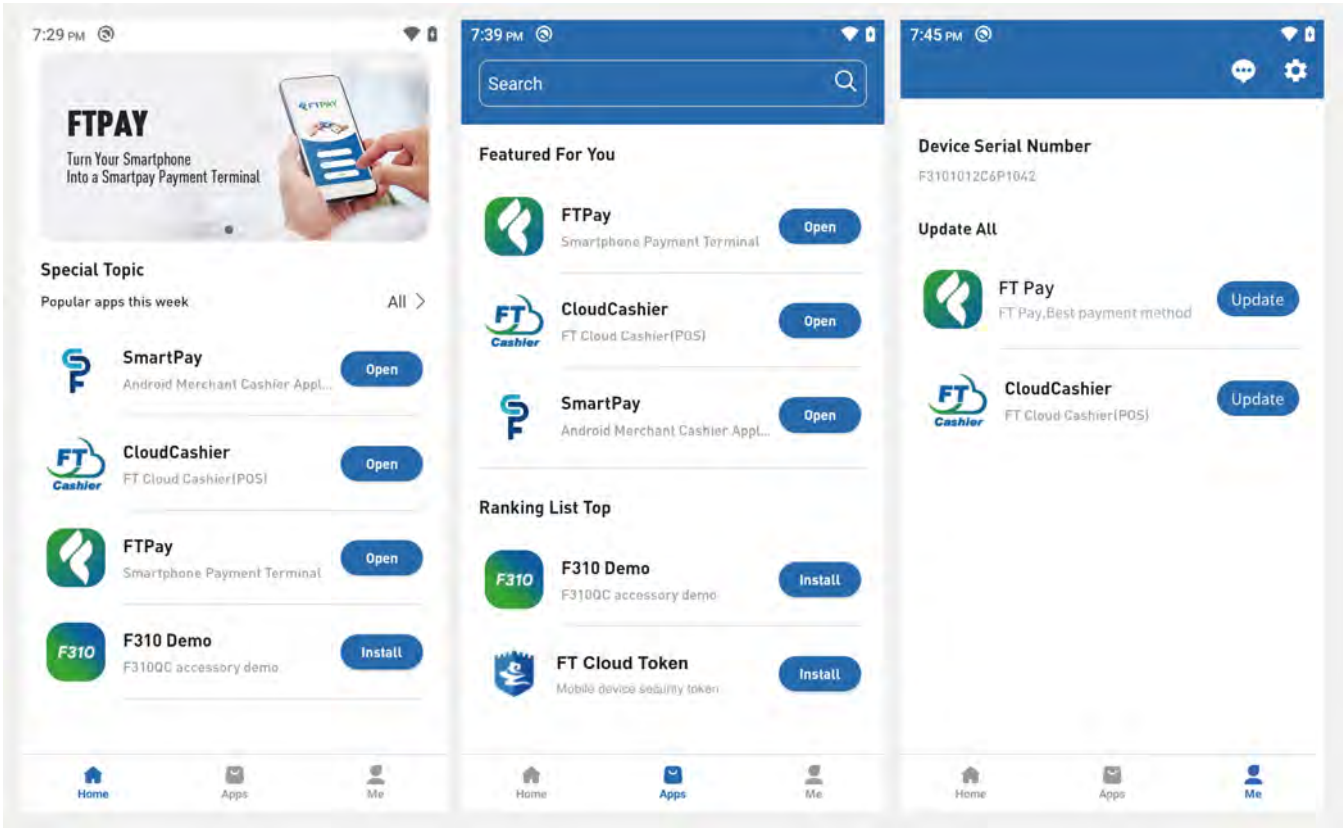

Ensuring secure, seamless application distribution services for trusted merchant

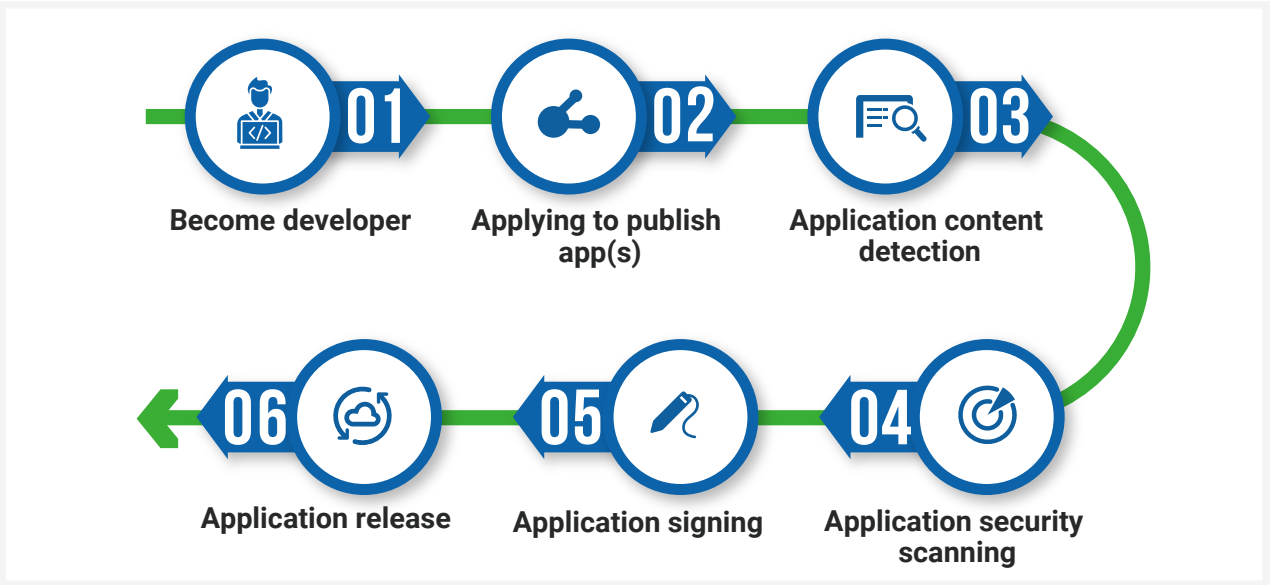

Empowering Your Business with Diverse and Flexible Options

|                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p><b>Helping partners grow together</b></p> <p>Empowering developers and merchants at every point of sales to receive continuous rewards.</p> |  <p><b>Diversified service options</b></p> <p>On demand service; paying for service fee as required to empower your business with diverse and flexible options.</p> |  <p><b>Customization and personalization</b></p> <p>Personalized recommendation function configuration to enhance customer experience and empower your business.</p> |  <p><b>Data security and privacy protection</b></p> <p>Encryption technology protect the security of application data during transmission and storage to solve customer concerns and promote orders.</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



# FT BRIDGE



## FT BRIDGE

Seamlessly Connecting Payment Terminals to Cash Registers

Simplify the process of connecting Feitian payment terminals to any cash register

With FT BRIDGE, our partners can seamlessly integrate their payment smart terminals with various cash register models, regardless of the connectivity options.

### FT BRIDGE Architecture

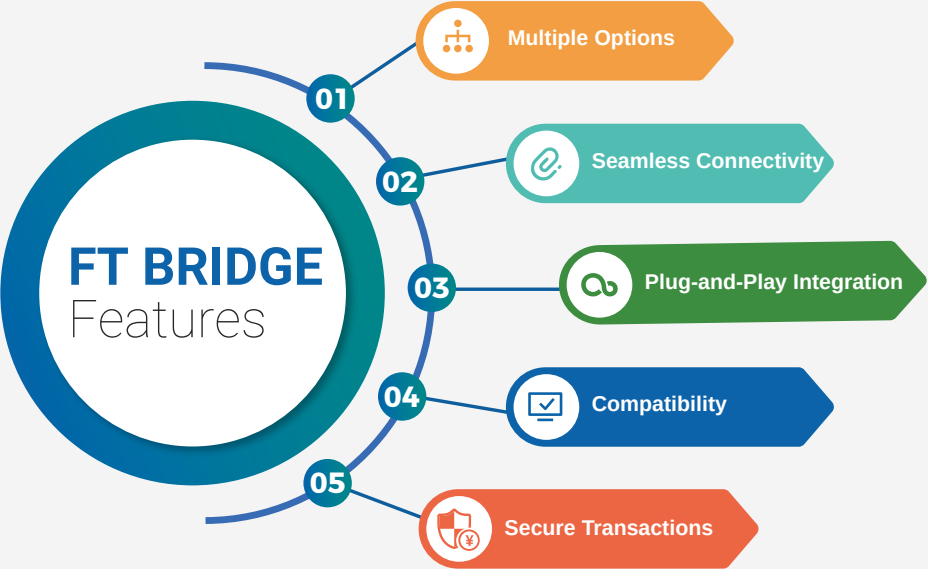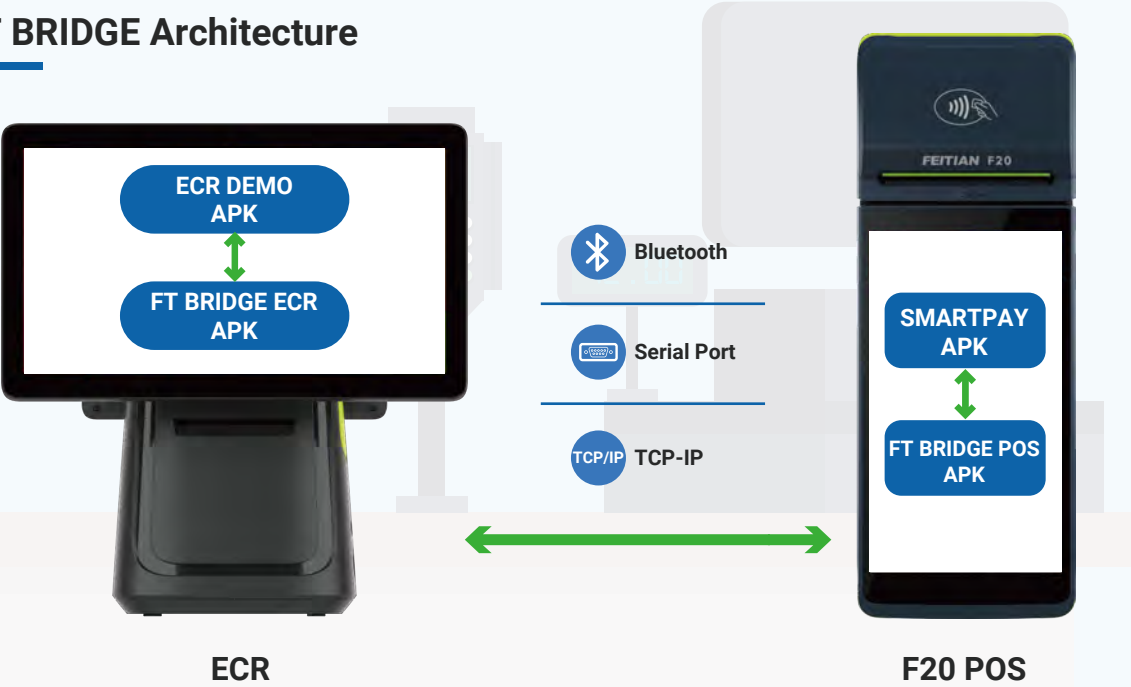

### Enrollment Process

